



- 01 **Reduce Wheel Tracking** at towers
- 02 **Reduce Soil Compaction and Runoff** by spreading out the flow over a larger area
- 03 **Fully hose-lined** boom
- 04 **Non-corrosive** connection
- 05 **Compatibility** with different diameter mainlines


## IACO BOOMBACKS

With so many models available, IACO Boombacks™ provide installation versatility and adaptability. Using booms lowers application intensity by widening the wetted area which is especially important on overhangs and at pivot towers. This allows more time for water to infiltrate the soil, reducing wheel tracking, runoff, and surface soil compaction. Booms can increase water savings by 33% and crop yields by 37%.

# IACO BOOMBACK™ MODELS


## Hose Boom

The IACO Hose Boom has built-in dampening to help produce a uniform water pattern. A typical application is to install four booms per tower. Use the 24 inches (0.6 m) of drop hose or cut as needed based on the desired installation. Models are 15 feet (4.6 m) and are available for mainline sizes from 3 to 10 inches (7.62 to 25.4 cm).

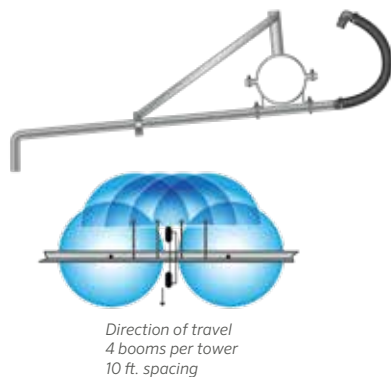


## Double Hose Boom

The IACO Double Hose Boom is ideal to convert wider spaced machines to perform like close spacing. Using the existing outlets, split the flow rate to two separate booms, lowering your instantaneous application intensity. Models are 30 feet (9.1 m) and are available for mainline sizes from 3 to 10 inches (7.62 to 25.4 cm).

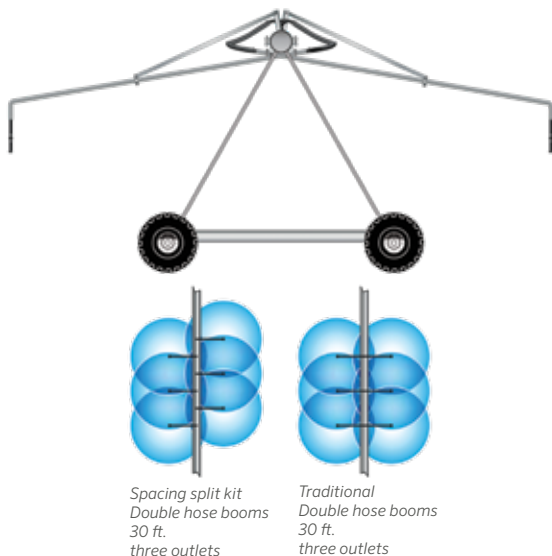


## Sling Finger Boom

The IACO Sling Finger is a stand-alone boom designed for towers to replicate the full spread of the truss rods at mid-span. The length of the boom is 75 inches (1.9 m) from the center of the mainline with a 48 inch (1.2 m) brace for stability. Models are 4 feet (1.2 m) and are available for mainline sizes from 3 to 10 inches (7.62 to 25.4 cm).

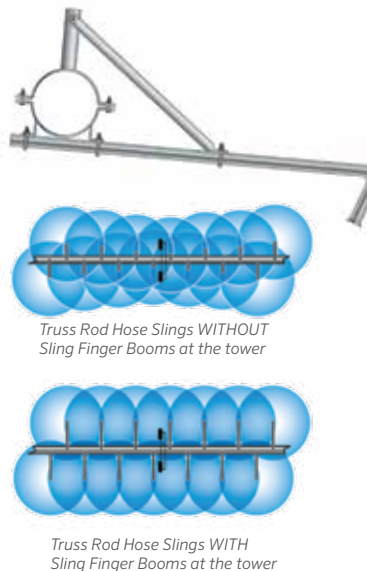

## Rigid Hose Drop

The IACO Rigid Hose Drop is designed for part-circle sprinklers on Poly-lined machines. The Side Force Control Fitting and Torque Clip dampen vibration and allow directional placement of the spray pattern. Models are 84 inch (2.1 m) or 120 inch (3 m) and are available for mainline sizes from 3 to 10 inches (7.62 to 25.4 cm).

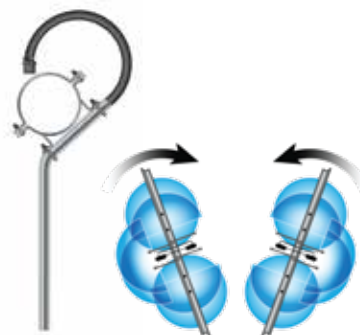

Website [senninger.com](http://senninger.com) | Customer Support 407-877-5655

The Senninger commitment to world-class products, local support and technical expertise ensure we provide the most efficient and reliable agricultural irrigation solutions available in the world today.

*Steve Abernethy*

Steve Abernethy, President of Senninger Irrigation