

PRLG

PRESSURE REGULATOR LANDSCAPE GRADE

Specifications

The pressure regulator shall be capable of operating at a constant, preset, non-adjustable outlet pressure of 10, 15, 20, 25, 30, 35, or 40 PSI (0.69, 1.03, 1.38, 1.72, 2.07, 2.41, or 2.76 bar) with a flow range between 0.5 - 7 GPM (114 - 1590 L/hr).

The pressure regulator shall maintain the nominal pressure at a minimum of 5 PSI (0.34 bar) above model inlet pressure and a maximum of 80 PSI (5.52 bar) above nominal model pressure*. Refer to the Model Numbers Chart on page 2 for outlet flow based on the model. Always install downstream from all shut-off valves. Recommended for outdoor use only. Not NSF certified.

All pressure regulator models shall be equipped with one of these inlet-x-outlet configurations:

Inlet

- 3/4-inch Female National Pipe Thread (FNPT)
- 3/4-inch Female Hose Thread (FHT)

Outlet

- 3/4-inch Male National Pipe Thread (MNPT)
- 3/4-inch Male Hose Thread (MHT)

The upper housing, lower housing, and internal molded parts shall be of engineering-grade thermoplastics with internal elastomeric seals and a reinforced elastomeric diaphragm. Regulation shall be accomplished by a fixed stainless steel compression spring, which shall be enclosed in a chamber isolated from the normal water passage.

The regulator external housings shall be press-fit with locking wedges and assembled without screws or other metallic fasteners. Outlet pressure and flow shall be clearly marked on the outside of each regulator.

The pressure regulator shall carry a two-year manufacturer’s warranty on materials, workmanship, and performance.

The pressure regulator shall be manufactured by Senninger Irrigation in Clermont, Florida. Senninger is a Hunter Industries Company.


* Please consult the factory for applications outside of recommended guidelines.

Physical

3/4" FNPT x 3/4" MNPT model (shown top right)

Overall Length
3.6 inches (9.1 cm)


Overall Width
1.6 inches (4.1 cm)

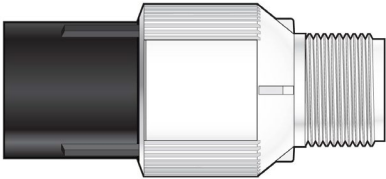

3/4" FHT x 3/4" MHT model (shown bottom right)

Overall Length
3.1 inches (7.9 cm)

Overall Width
1.6 inches (4.1 cm)





PRLG

PRESSURE REGULATOR LANDSCAPE GRADE

Model Numbers

Model #	Flow Range	Preset Operating Pressure	Maximum Inlet Pressure
PRLG103FH3MH (hose x hose) or PRLG103F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	10 PSI (0.69 bar)	90 psi (6.20 bar)
PRLG153FH3MH (hose x hose) or PRLG153F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	15 PSI (1.03 bar)	95 psi (6.55 bar)
PRLG203FH3MH (hose x hose) or PRLG203F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	20 PSI (1.38 bar)	100 psi (6.89 bar)
PRLG253FH3MH (hose x hose) or PRLG253F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	25 PSI (1.72 bar)	105 psi (7.24 bar)
PRLG303FH3MH (hose x hose) or PRLG303F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	30 PSI (2.07 bar)	110 psi (7.58 bar)
PRLG353FH3MH (hose x hose) or PRLG353F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	35 PSI (2.41 bar)	115 psi (7.93 bar)
PRLG403FH3MH (hose x hose) or PRLG403F3M (NPT x NPT)	0.5 - 7 GPM (114 - 1590 L/hr)	40 PSI (2.76 bar)	120 psi (8.27 bar)