

MANUFACTURERS OF SENNINGER® PRODUCTS
Built on Innovation®



Reduces Wheel Tracking:

Part-circle design is ideal for use at towers and on booms

Improves Yield:

Distribution pattern helps promote more consistent crop development at towers

Preserves Soil Structure:

Gentle rainlike uniform pattern for lower application intensity

Longest Warranty:

3 years covering materials, workmanship, and performance

I-WOB®2 PART-CIRCLE MODEL

The newest member of the i-Wob2 family

The Senninger® i-Wob2 Part-Circle is the perfect center pivot irrigation solution for towers and boomback installations. The shroud acts as a dual nozzle carrier for easy renozzling. Senninger Wobbler® sprinklers are recognized worldwide for their ability to distribute water in a uniform pattern that is resistant to wind drift and evaporation.



Learn more.
Scan here to
visit our website



I-WOB®2 PART-CIRCLE FEATURES AND INSTALLATION


Features

- Part-circle distribution with a gentle rainlike pattern
- Shroud acts as a dual nozzle carrier for easy renozzling
- Low operating pressures save water, energy, and money
- Flows: 1.09 to 18.35 gpm
- Pressures: 10 to 15 psi
- Three-year warranty on materials, workmanship, and performance
- Patent-pending Hydrofoil multi-trajectory deflector



Installation

- Always mount the i-Wob2 Part-Circle on the outlet end of any rigid drop or boomback.
- Always mount the i-Wob2 part-circle sprinkler so that the UP3® nozzle tabs in operation face in the opposite direction of the distribution pattern

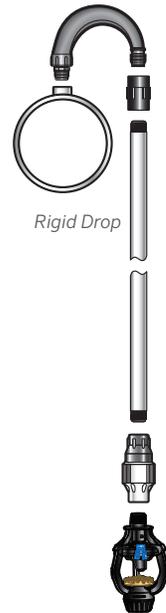

Inserted
Operating Nozzle

Distribution
pattern

- Mount the i-Wob2 Part-Circle with a minimum ground clearance of 3 ft.
- Pressure regulators can be installed at the top of the drop or near the applicator. Follow your customized printout for proper pressure regulator placement.

I-WOB2 PART-CIRCLE DESIGN CRITERIA

Nozzle Sizes	
Minimum	#7 7/64"
Maximum*	#26 13/32"
Flows	
Minimum	1.09 gpm
Maximum	18.35 gpm
Radius	
At 3 ft Height	16 - 19 ft
At 6 ft Height	20 - 24 ft
At 9 ft Height	22 - 26 ft
Pressures	
Minimum	10 psi
Maximum	15 psi

* It is recommended that larger nozzle sizes be used only on soils that can handle higher application rates.

NOTE: Any modifications or deletions regarding installation requirements will void product warranty.



Website hunterirrigation.com/agriculture | **Customer Support** +1-407-877-5655

The Hunter® Agricultural Irrigation commitment to world-class Senninger® products, local support and technical expertise ensure we provide the most efficient and reliable agricultural irrigation solutions available in the world today.

Steve Abernethy

Steve Abernethy, President Hunter Agricultural Irrigation

© 2026 Hunter Industries Inc. Hunter, the Hunter logo, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries. ♻️ Please recycle.