


Mining Solutions

Efficient irrigation for leach recovery of gold, silver and copper that conserves energy and helps reduce carbon footprint.

Hunter®

Mining Irrigation

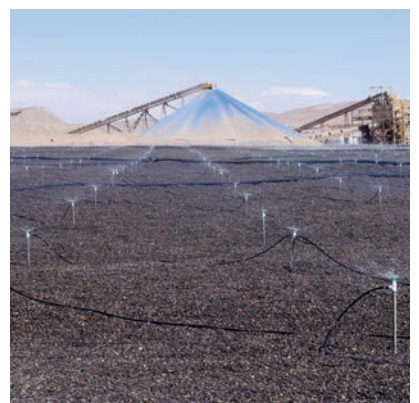

WHAT'S INSIDE

WOBBLER® SPRINKLERS

■ mini-Wobbler™	4
■ Xcel-Wobbler™	6
■ Wobbler®	8
■ Installation Options	10

ADVANTAGES OF WOBBLER® TECHNOLOGY

■ Uniformity	11
■ Orifice	12
■ Cost Savings	12
■ Side Slope Leaching	13

AUTOMATION SOLUTIONS

Node-BT Controller, Electric Valves	
■ Electric Vales and Other Solutions	14

IMPACT SPRINKLERS

NEW ■ Impact Sprinkler: Part Circle	16
■ Dust Suppression	18
■ Impact Sprinkler: 80 Series	20

SPRAYS

■ Super Spray® for Evaporation	22
--------------------------------	----

PRESSURE REGULATION

■ Pressure Regulation Overview	24
NEW ■ PRMP - Mining Prospector	26
■ PRL - Low Fow	28
■ PMR-MF - Medium Flow	30
■ PR-HF - High Flow	32
■ PRU - Ultra Flow	34
NEW ■ PRLV - Limit Valve	36
■ PRU-LV - Ultra Limit Valve	38

COMPONENTS

■ Riser Adapter	40
■ Quick-Connect Coupling	41

SOFTWARE

■ WinSIPP™ Mining	42
■ IrriMaker/IrriExpress	44

RESOURCES

■ Nozzles	46
■ Warranty	47



PROVEN IRRIGATION TECHNOLOGY FOR **DEMANDING MINING OPERATIONS**

Since 1966, **Senninger®** has been recognized worldwide for its **Low Pressure – High Performance™** irrigation solutions. Building on our agricultural expertise, we introduced our first line of **Custom Mining Sprinklers (CMS)** in 1970, combining durable materials, efficient designs, and precision pressure control to meet the demanding conditions of **copper, silver, and gold mining operations.**

Today, as **Hunter® Agricultural Irrigation**, we continue to expand our reach and capabilities, offering reliable products and world-class support wherever your operation is located.

What This Means for You:

- Continued delivery of high-quality **Senninger®** products
- Expanded facilities and global presence to serve your needs
- Dedicated technical expertise and customer service you can count on
- Ongoing investment in production, automation, and innovation
- Long-term commitment to the mining markets we proudly serve


We are grateful for your continued partnership and trust. Your support drives our passion to engineer **industry-leading products**, deliver **educational programs**, and provide **exceptional service**, today and for decades to come.



- Outstanding uniformity
- High application efficiency at low operating
- Various droplet sizes available based on selected nozzle size and pressure
- A wide range of flows to deliver the optimal application rate
- Only one moving part helps ensure product longevity
- Inlet size: 1/2" NPT male

For proper field designing, use our irrigation design tool WinSIPP™ Mining. More information about this software is on page 42.

In this example, a mini-Wobbler CMS can deliver near 90% Coefficient Uniformity when used with at 20 x 20 ft (6 x 6 m) spacing, with 20 psi (1.38 bar) of pressure, and a #5 nozzle.

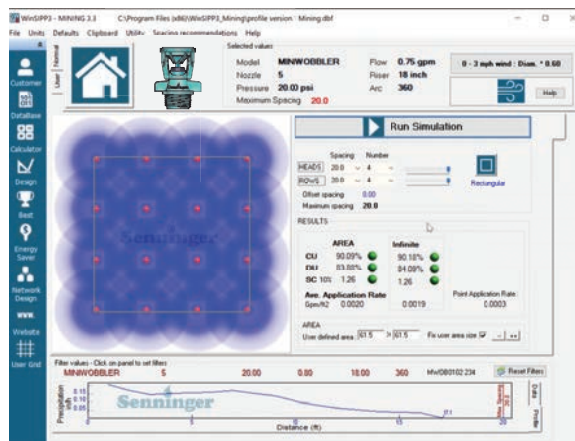

Riser Stake:
14" or 26" height

Super Barb
FTA15B2T

Winged Hose
Barb Bushing
FTHS2T

mini-Wobbler

Riser Adapter
Quick Connect
RSAD345

Tubing:
0.345" ID

The diagram illustrates the Riser Stake assembly. It features a vertical riser stake with a height of 14" or 26". The stake is equipped with a Super Barb (FTA15B2T) and a Winged Hose Barb Bushing (FTHS2T). A mini-Wobbler is attached to the top of the stake, and a Riser Adapter Quick Connect (RSAD345) is used to connect the tubing. The tubing has an inner diameter (ID) of 0.345". The entire assembly is shown in a cross-section of the ground, with the stake passing through a layer of gravel and into the soil.

This diagram illustrates a mini-wobblers riser assembly. It features a vertical riser pipe labeled "HDPE Riser" that passes through a horizontal pipe labeled "Pre Engineered Saddle or Fitting". The assembly is shown installed in a trench, with the riser pipe extending above the ground surface. A "mini-Wobblers" device is attached to the top of the riser pipe. The riser pipe is surrounded by a layer of gravel or crushed stone, and the saddle fitting is also surrounded by gravel. The background shows a cross-section of the ground with a blue sky above and brown soil below.

4

mini-Wobbler™



MINI-WOBBLER CMS PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi			SPRINKLER INLET PRESSURE-METRIC	bar		
	15	20	25		1.03	1.38	1.72
#4 Nozzle - Blue (1/16")				#4 Nozzle - Blue (1.59 mm)			
Flow (gpm)	0.42	0.50	0.56	Flow (L/hr)	95	114	127
Diameter at 1.5 ft ht (ft)	26.5	28.0	28.0	Diameter at 0.46 m ht (m)	8.1	8.5	8.5
#5 Nozzle - Brown (5/64")				#5 Nozzle - Brown (1.98 mm)			
Flow (gpm)	0.64	0.75	0.84	Flow (L/hr)	145	170	191
Diameter at 1.5 ft ht (ft)	31.0	33.5	35.0	Diameter at 0.46 m ht (m)	9.4	10.2	10.7
#6 Nozzle - Orange (3/32")				#6 Nozzle - Orange (2.38 mm)			
Flow (gpm)	0.95	1.10	1.25	Flow (L/hr)	216	250	284
Diameter at 1.5 ft ht (ft)	33.0	36.0	37.0	Diameter at 0.46 m ht (m)	10.1	11.0	11.3
#7 Nozzle - Dark Green (7/64")				#7 Nozzle - Dark Green (2.78 mm)			
Flow (gpm)	1.30	1.51	1.69	Flow (L/hr)	295	343	384
Diameter at 1.5 ft ht (ft)	35.0	37.5	38.5	Diameter at 0.46 m ht (m)	10.7	11.4	11.7
#8 Nozzle - Purple (1/8")				#8 Nozzle - Purple (3.18 mm)			
Flow (gpm)	1.67	1.95	2.18	Flow (L/hr)	379	443	495
Diameter at 1.5 ft ht (ft)	35.5	38.5	38.0	Diameter at 0.46 m ht (m)	10.8	11.7	11.9

Sprinkler performance may vary with actual field conditions. Other nozzle sizes are available. Stream heights range from 1.5 to 3.0 ft (0.46 to 0.91 m) above nozzle based on pressure and nozzle size.

Xcel-Wobbler™ High & Mid Angle

Flow: 0.78 to 6.23 gpm (117 to 1415 L/hr)
Pressure: 10 to 20 psi (0.69 to 1.38 bar)



HIGH ANGLE

MID ANGLE

FEATURES


- Outstanding uniformity
- High application efficiency at low operating pressure
- Various droplet sizes available based on selected nozzle size and pressure
- A wide range of flows to deliver the optimal application rate
- Only one moving part helps ensure product longevity
- Inlet size: 1/2" or 3/4" NPT male



Design a Leaching System with the Xcel-Wobbler™


For proper field designing, use our irrigation design tool WinSIPP™ Mining. More information about this software is on page 42.

In this example, an Xcel-Wobbler High Angle CMS can deliver 90% Coefficient Uniformity when used with at 20 x 20 ft (6 x 6 m) with 20 psi (1.38 bar) of pressure, and a #9 nozzle.

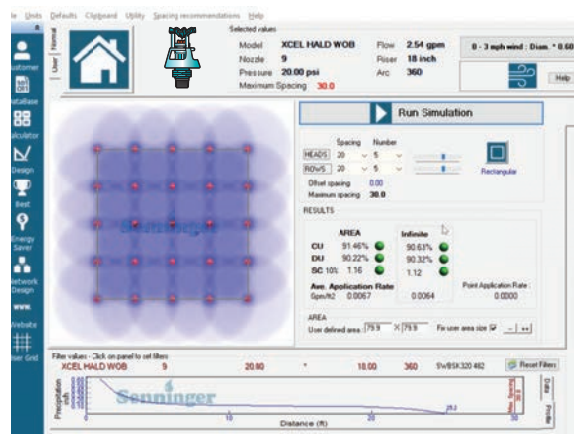


Installation Options

PVC RISER WITH PRESSURE REGULATOR

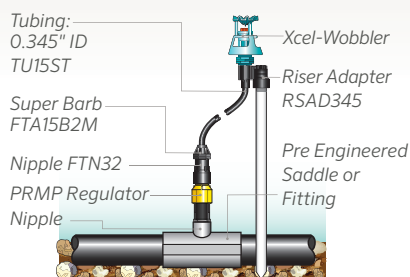

HDPE RISER

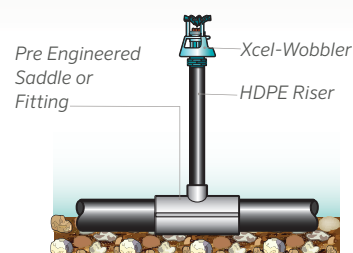

See installation options on page #10

High & Mid Angle Xcel-Wobbler™


XCEL-WOBBLER CMS PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi			SPRINKLER INLET PRESSURE-METRIC	bar		
	10	15	20		0.69	1.03	1.38
#6 Nozzle - Gold (3/32")				#6 Nozzle - Gold (2.38 mm)			
Flow (gpm)	0.78	0.95	1.10	Flow (L/hr)	177	216	250
HA Diameter at 1.5 ft ht (ft)	36.5	41.0	45.0	HA Diameter at 0.46 m ht (m)	11.1	12.5	13.7
MA Diameter at 1.5 ft ht (ft)	32.0	35.0	38.5	MA Diameter at 0.46 m ht (m)	9.8	10.7	11.7
#7 Nozzle - Lime (7/64")				#7 Nozzle - Lime (2.78 mm)			
Flow (gpm)	1.06	1.30	1.50	Flow (L/hr)	241	295	341
HA Diameter at 1.5 ft ht (ft)	40.0	46.5	47.0	HA Diameter at 0.46 m ht (m)	12.2	14.2	14.3
MA Diameter at 1.5 ft ht (ft)	33.0	36.5	40.5	MA Diameter at 0.46 m ht (m)	10.1	11.1	12.4
#8 Nozzle - Lavender (1/8")				#8 Nozzle - Lavender (3.18 mm)			
Flow (gpm)	1.40	1.71	1.98	Flow (L/hr)	318	388	450
HA Diameter at 1.5 ft ht (ft)	42.0	46.5	47.0	HA Diameter at 0.46 m ht (m)	12.8	14.2	14.3
MA Diameter at 1.5 ft ht (ft)	34.0	38.5	41.0	MA Diameter at 0.46 m ht (m)	10.4	11.7	12.5
#9 Nozzle - Grey (9/64")				#9 Nozzle - Grey (3.57 mm)			
Flow (gpm)	1.80	2.20	2.54	Flow (L/hr)	409	500	577
HA Diameter at 1.5 ft ht (ft)	44.0	47.0	50.5	HA Diameter at 0.46 m ht (m)	13.4	14.3	15.4
MA Diameter at 1.5 ft ht (ft)	34.5	40.5	42.0	MA Diameter at 0.46 m ht (m)	10.5	12.4	12.8
#10 Nozzle - Turquoise (5/32")				#10 Nozzle - Turquoise (3.97 mm)			
Flow (gpm)	2.22	2.72	3.14	Flow (L/hr)	504	618	713
HA Diameter at 1.5 ft ht (ft)	44.5	49.0	50.5	HA Diameter at 0.46 m ht (m)	13.6	14.9	15.4
MA Diameter at 1.5 ft ht (ft)	36.0	41.0	42.5	MA Diameter at 0.46 m ht (m)	11.0	12.5	13.0
#11 Nozzle - Yellow (11/64")				#11 Nozzle - Yellow (4.37 mm)			
Flow (gpm)	2.69	3.30	3.81	Flow (L/hr)	611	749	865
HA Diameter at 1.5 ft ht (ft)	44.5	50.5	51.5	HA Diameter at 0.46 m ht (m)	13.6	15.4	15.7
MA Diameter at 1.5 ft ht (ft)	36.0	41.5	43.0	MA Diameter at 0.46 m ht (m)	11.0	12.7	13.1
#12 Nozzle - Red (3/16")				#12 Nozzle - Red (4.76 mm)			
Flow (gpm)	3.23	3.96	4.57	Flow (L/hr)	734	899	1038
HA Diameter at 1.5 ft ht (ft)	46.0	50.5	52.0	HA Diameter at 0.46 m ht (m)	14.0	15.4	15.9
MA Diameter at 1.5 ft ht (ft)	36.5	41.5	44.5	MA Diameter at 0.46 m ht (m)	11.1	12.7	13.6
#13 Nozzle - White (13/64")				#13 Nozzle - White (5.16 mm)			
Flow (gpm)	3.80	4.65	5.38	Flow (L/hr)	863	1056	1222
HA Diameter at 1.5 ft ht (ft)	46.5	51.0	52.5	HA Diameter at 0.46 m ht (m)	14.2	15.6	16.0
MA Diameter at 1.5 ft ht (ft)	36.5	41.5	44.5	MA Diameter at 0.46 m ht (m)	11.1	12.7	13.6
#14 Nozzle - Blue (7/32")				#14 Nozzle - Blue (5.56 mm)			
Flow (gpm)	4.40	5.39	6.23	Flow (L/hr)	999	1224	1415
HA Diameter at 1.5 ft ht (ft)	47.0	51.0	53.0	HA Diameter at 0.46 m ht (m)	14.3	15.6	16.2
MA Diameter at 1.5 ft ht (ft)	37.0	42.5	45.0	MA Diameter at 0.46 m ht (m)	11.3	13.0	13.7

HA = high-angle, MA = mid-angle. Sprinkler performance may vary with actual field conditions. Stream heights range from 2.5 to 5.5 ft (0.8 to 1.7 m) above nozzle based on pressure and nozzle size.

Wobbler® Standard and Low Angle

Flow: 0.78 to 6.23 gpm (117 to 1415 L/hr)
Pressure: 10 to 20 psi (0.69 to 1.38 bar)

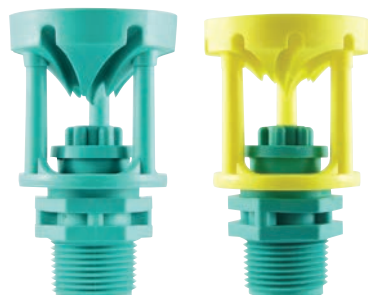

**STANDARD
ANGLE**

**LOW
ANGLE**

FEATURES


- Outstanding uniformity
- High application efficiency at low operating pressure
- Various droplet sizes available based on selected nozzle size and pressure
- A wide range of flows to deliver the optimal application rate
- Only one moving part helps ensure product longevity
- Inlet size: 1/2" or 3/4" NPT male



Design a Leaching System with the Wobbler


For proper field designing, use our irrigation design tool WinSIPP™ Mining. More information about this software is on page 42.

In this example, a Wobbler CMS can deliver a 90% Coefficient Uniformity when used with at 22 x 22 ft (7 x 7 m) triangular spacing, with 20 psi (1.38 bar) of pressure, and a #9 nozzle.

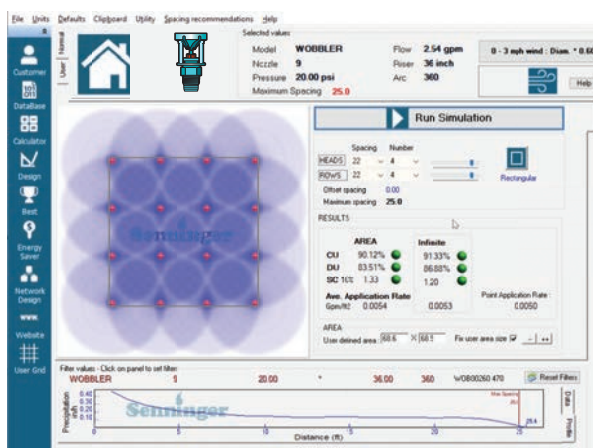


Installation Options

SADDLE

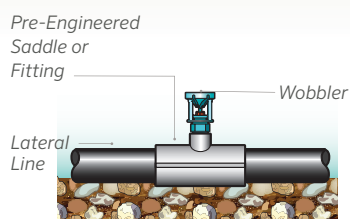

PRESSURE REGULATOR

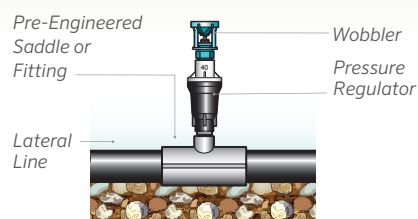

See mounting options on page #10


Standard and Low Angle **Wobbler®**

WOBBLER CMS PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi			SPRINKLER INLET PRESSURE-METRIC	bar		
	10	15	20		0.69	1.03	1.38
#6 Nozzle - Gold (3/32")				#6 Nozzle - Gold (2.38 mm)			
Flow (gpm)	0.78	0.95	1.10	Flow (L/hr)	177	216	250
SA Diameter at 1.5 ft ht (ft)	34.0	39.0	41.5	SA Diameter at 0.46 m ht (m)	10.4	11.9	12.7
LA Diameter at 1.5 ft ht (ft)	29.0	34.5	38.0	LA Diameter at 0.46 m ht (m)	8.8	10.5	11.6
#7 Nozzle - Lime (7/64")				#7 Nozzle - Lime (2.78 mm)			
Flow (gpm)	1.06	1.30	1.50	Flow (L/hr)	241	295	341
SA Diameter at 1.5 ft ht (ft)	36.5	41.5	43.5	SA Diameter at 0.46 m ht (m)	11.1	12.7	13.3
LA Diameter at 1.5 ft ht (ft)	31.5	37.0	40.0	LA Diameter at 0.46 m ht (m)	9.6	11.3	12.2
#8 Nozzle - Lavender (1/8")				#8 Nozzle - Lavender (3.18 mm)			
Flow (gpm)	1.40	1.71	1.98	Flow (L/hr)	318	388	450
SA Diameter at 1.5 ft ht (ft)	38.5	43.5	45.0	SA Diameter at 0.46 m ht (m)	11.7	13.3	13.7
LA Diameter at 1.5 ft ht (ft)	34.0	39.0	41.5	LA Diameter at 0.46 m ht (m)	10.4	11.9	12.7
#9 Nozzle - Grey (9/64")				#9 Nozzle - Grey (3.57 mm)			
Flow (gpm)	1.80	2.20	2.54	Flow (L/hr)	409	500	577
SA Diameter at 1.5 ft ht (ft)	40.5	45.5	46.5	SA Diameter at 0.46 m ht (m)	12.4	13.9	14.2
LA Diameter at 1.5 ft ht (ft)	35.5	40.5	42.5	LA Diameter at 0.46 m ht (m)	10.8	12.4	13.0
#10 Nozzle - Turquoise (5/32")				#10 Nozzle - Turquoise (3.97 mm)			
Flow (gpm)	2.22	2.72	3.14	Flow (L/hr)	504	618	713
SA Diameter at 1.5 ft ht (ft)	42.0	47.0	48.0	SA Diameter at 0.46 m ht (m)	12.8	14.3	14.6
LA Diameter at 1.5 ft ht (ft)	36.0	41.0	43.0	LA Diameter at 0.46 m ht (m)	11.0	12.5	13.1
#11 Nozzle - Yellow (11/64")				#11 Nozzle - Yellow (4.37 mm)			
Flow (gpm)	2.69	3.30	3.81	Flow (L/hr)	611	749	865
SA Diameter at 1.5 ft ht (ft)	43.0	48.0	49.0	SA Diameter at 0.46 m ht (m)	13.1	14.6	14.9
LA Diameter at 1.5 ft ht (ft)	36.5	42.0	43.5	LA Diameter at 0.46 m ht (m)	11.1	12.8	13.3
#12 Nozzle - Red (3/16")				#12 Nozzle - Red (4.76 mm)			
Flow (gpm)	3.23	3.96	4.57	Flow (L/hr)	734	899	1038
SA Diameter at 1.5 ft ht (ft)	44.0	49.0	50.0	SA Diameter at 0.46 m ht (m)	13.4	14.9	15.3
LA Diameter at 1.5 ft ht (ft)	37.0	42.5	44.0	LA Diameter at 0.46 m ht (m)	11.3	13.0	13.4
#13 Nozzle - White (13/64")				#13 Nozzle - White (5.16 mm)			
Flow (gpm)	3.80	4.65	5.38	Flow (L/hr)	863	1056	1222
SA Diameter at 1.5 ft ht (ft)	44.5	49.5	50.5	SA Diameter at 0.46 m ht (m)	13.6	15.1	15.4
LA Diameter at 1.5 ft ht (ft)	37.5	43.0	44.5	LA Diameter at 0.46 m ht (m)	11.4	13.1	13.6
#14 Nozzle - Blue (7/32")				#14 Nozzle - Blue (5.56 mm)			
Flow (gpm)	4.40	5.39	6.23	Flow (L/hr)	999	1224	1415
SA Diameter at 1.5 ft ht (ft)	45.0	50.0	51.0	SA Diameter at 0.46 m ht (m)	13.7	15.3	15.6
LA Diameter at 1.5 ft ht (ft)	38.0	43.5	45.0	LA Diameter at 0.46 m ht (m)	11.6	13.3	13.7


SA = standard-angle, LA = mid-angle. Sprinkler performance may vary with actual field conditions.
Stream heights range from 2.5 to 5.5 ft (0.8 to 1.7 m) above nozzle based on pressure and nozzle size.

Installation Options

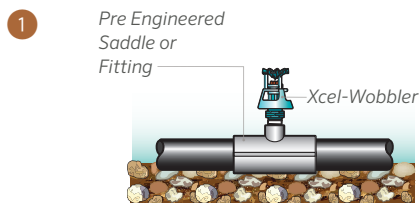


SADDLE

The mini-Wobbler™, Xcel-Wobbler™ or Wobbler® can be mounted directly to a saddle or pre-engineered plastic female fitting.

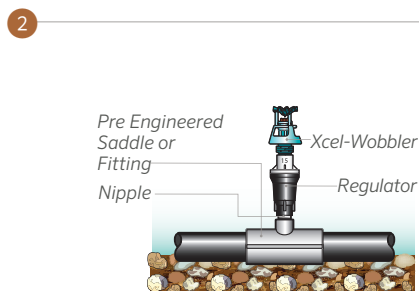


PRESSURE REGULATOR

The mini-Wobbler, Xcel-Wobbler or Wobbler can be mounted directly to a pressure regulator. A nipple is required to connect the regulator to the saddle. Use a carbon or stainless-steel nipple for gold and silver leaching and a stainless-steel nipple for copper leaching.

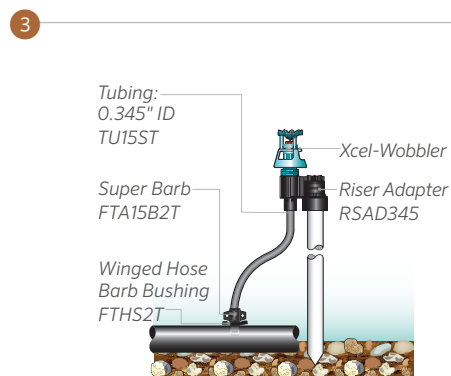


PVC RISER

The mini-Wobbler or Xcel-Wobbler can be mounted on a PVC riser or the Senninger Riser Stake using the Senninger Riser Adapter. See page 40 for details.

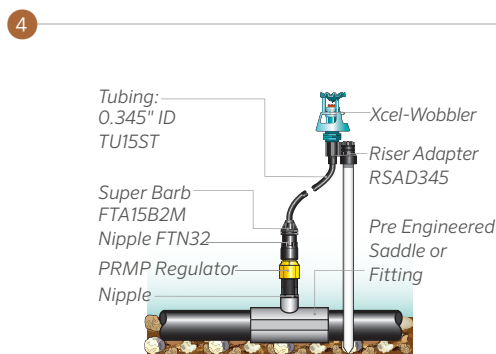

PVC RISER WITH PRESSURE REGULATOR

The mini-Wobbler or Xcel-Wobbler can be mounted on a PVC riser or the Senninger Riser Stake and used with a pressure regulator.

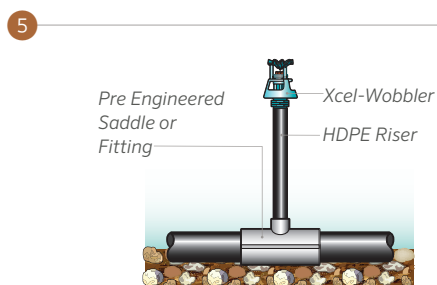

HDPE RISER


The mini-Wobbler or Xcel-Wobbler can be mounted on a HDPE riser that connects to a saddle.

Outstanding Uniformity

Senninger® Wobbler® Technology utilizes a unique off-center rotary action that provides extremely uniform solution distribution, which is essential to maximizing metals recovery.

Wobbler® Technology sprinklers are the most effective method for total solution contact due to the consistent droplet size that covers a full 360 degrees area instantaneously, so the solution reaches the ore surface with a gentle and even distribution.

This product line has been engineered and designed to provide optimal performance at low pressures, as low as 10 psi (0.69 bar), which not only minimizes evaporative losses but also saves energy and allows greater areas to be leached in less time. This can save money and increase productivity.

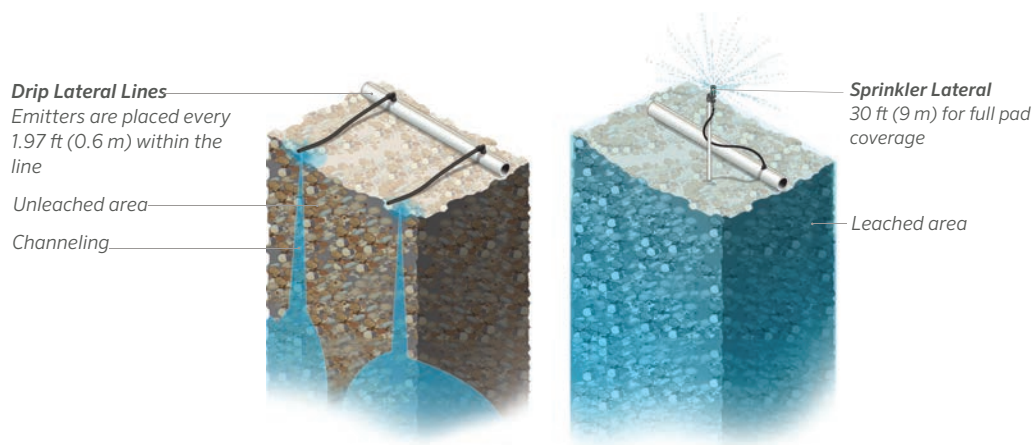

Drip systems depend on the source point application of the solution, which promotes channeling. With a minimal lateral movement of the applied solution, drip systems have a challenge achieving the desired application rate.

Carbon Footprint

It is possible to reduce the carbon footprint in the mining industry by implementing technologies that not only perform more efficiently but also are more durable in the field. Consequently, they significantly decrease waste and pollution.

They have provided the highest water and energy efficiency while increasing productivity in the mining leaching process for decades.

Other technologies, like drip systems in mining, entail a high environmental cost due to the continual replacement of drip lines due to their high deterioration rate.



Orifice Advantages

Senninger® Wobbler® Technology sprinklers like the mini-Wobbler™ employ nozzle sizes that are larger than drip systems. This minimizes clogging issues without the need for excessive fine filtration, which can significantly increase operational costs for pad leaching.

ORIFICE ADVANTAGE

MINI-WOBBLER NOZZLE ORIFICES


#6 Nozzle Orifice
3/32" (2.38 mm)

#7 Nozzle Orifice
1/16" (2.78 mm)

#8 Nozzle Orifice
1/8" (3.17 mm)

TYPICAL DRIP ORIFICE SIZE

0.052"
(1.32 mm)




Cost Savings Advantages

WOBBLER® TECHNOLOGY

The Wobbler Technology sprinklers can be spaced 20 x 23 ft (6 x 7 m) between sprinklers and lateral lines to deliver an optimal application rate. Material and installation costs are lower in both the short and long term. Plus, sprinklers are much easier to service.

DRIP

Drip irrigation systems require spacing of about 2 ft or (0.61 m) between drip lines for the emitters to reach the optimal application rate. Installation costs and maintenance costs can be higher to correct clogged drip lines.

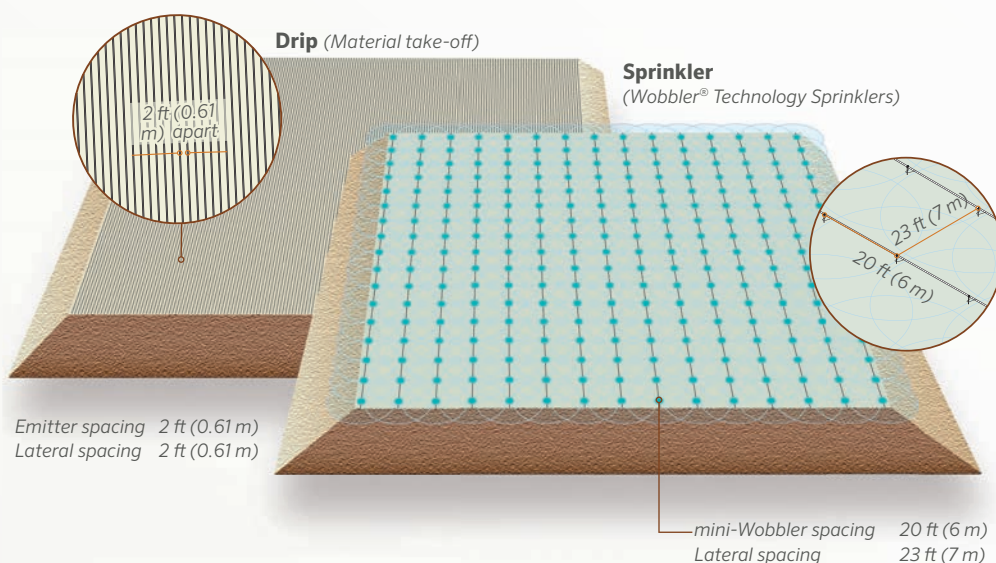

BILL OF MATERIAL	Sprinkler	Drip
16 mm PE lateral / (20 mm) PE lateral	4,700 linear ft (1,433 linear m)	54,000 linear ft (16,459 linear m)
Fittings	15	328
Emitters	255	27,000
ENERGY REQUIRED	Sprinkler	Drip
Pumps	60	60
Pipes	10	10
Fittings	2	2
Emitter Operating Pressure	15	15
Filtration	4	8
TOTAL	91	95

Based on Irri-Maker® design for pad 328 x 328 ft (100 x 100 m)

ADDITIONAL ADVANTAGES

- Increases coverage efficiency
- Versatility of being moved and used repeatedly
- Visual confirmation of uniformity.
- Adjustable flow and application rates.
- Adapts to pad rinsing for reclamation.
- Can replace obsolete drip systems easily.

Side Slope Leaching



Because Wobbler® Technology applies mining leach solutions with high uniformity, it can be adapted for use in hard-to-reach areas. Mineral extraction from side slopes is vital in mining. Wobbler sprinklers can help capture these resources efficiently with chemical solutions using low energy consumption.

DESIGN A SIDE SLOPE LEACHING SYSTEM WITH WOBBLER® TECHNOLOGY

Be sure to use the Irri-Maker™ Software to design the most precise irrigation system on the side slope. It gives you the option to select a sprinkler type, pressures, valves, and pipe diameters based on flow velocities. More information about this software, on page 42.



WOBBLER TECHNOLOGY TRANSFORMING ECOSYSTEMS

In the land recovery stages following mine closures, Wobbler Technology can provide efficient irrigation for those areas to help speed up the reforestation process.



ADVANTAGES

- Reduce the carbon footprint by efficiently irrigating the trees in inert areas. Ultimately, this helps to provide oxygen to our planet.
- Provides efficient irrigation application in hard-to-reach areas.
- Increases coverage efficiency.
- Provides the versatility of being moved and used repeatedly.
- Affords visual confirmation of uniformity.
- Allows adjustable flow and application rates.
- Can replace obsolete drip system

Node-BT Controllers

The battery-operated NODE-BT controller from Hunter® Industries is enabled with powerful wireless Bluetooth® technology that can be easily managed from a smartphone. It's a reliable choice for areas where AC power is unavailable.


BENEFITS

- Enabled with Bluetooth® technology with easy wireless configuration of schedules via Smartphone app.
- Unlimited device control and mapping via the same app.
- Models available for 1, 2, or 4 stations.



Electric Valves

Valves from Hunter Industries work seamlessly with high demand systems.

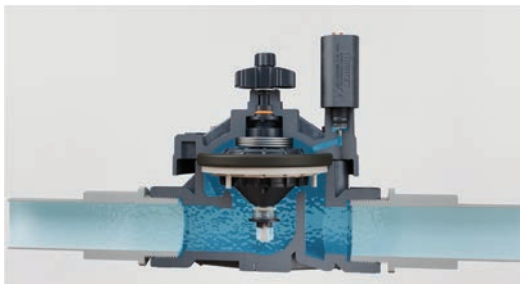

BENEFITS

- Optional Filter Sentry® scours the filter screen in dirty water conditions
- Glass-filled nylon construction provides high pressure rating and reliability
- Double-beaded diaphragm seal design ensures leak-free performance
- Fabric-reinforced EPDM diaphragm and seat ensure greater performance in all water conditions
- Captive bonnet screws eliminate the possibility of lost parts during disassembly

Other Solutions

Senninger® Wobbler® Technology sprinklers are also used for solar panels maintenance. The high uniformity of this product line helps keep them free of particles. As a result, the panels can absorb the greatest amount of solar energy the whole year round.





Part-Circle

Flow: 2.42 to 16.1 gpm (550 to 3657 L/hr)
Pressure: 30 to 55 psi (2.07 to 3.79 bar)

Senninger® Part-Circle impact sprinklers allow adjustments to match the desired area of coverage. They are mainly used in dust suppression.



FEATURES

- Distributes water in a 20° to 365° adjustable pattern, no tools required
- Covered reversing mechanism
- 23° and 23° trajectory models for maximum radius of throw
- Inlet size: ¾" and 1" NPT male (¾" NPT female and 1" NPT female also available)

3123 PART-CIRCLE EFFLUENT PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi						SPRINKLER INLET PRESSURE-METRIC	bar					
	30	35	40	45	50	55		2.07	2.42	2.76	3.11	3.45	3.79
#8 Nozzle - Lav. (1/8")							#8 Nozzle - Lav. (3.18 mm)						
Flow (gpm)	2.42	2.62	2.79	2.97	3.12	3.28	Flow (L/hr)	550	595	634	675	709	745
Radius at 1.5 ft ht (ft)	38	39	40	41	42	42	Radius at 0.46 m ht (m)	11.6	11.9	12.2	12.5	12.8	12.8
#9 Nozzle - Grey (9/64")							#9 Nozzle - Grey (3.57 mm)						
Flow (gpm)	3.08	3.33	3.56	3.78	3.98	4.16	Flow (L/hr)	700	756	809	859	904	949
Radius at 1.5 ft ht (ft)	40	41	42	43	43	44	Radius at 0.46 m ht (m)	12.2	12.5	12.8	13.1	13.1	13.4
#10 Nozzle - Turq. (5/32")							#10 Nozzle - Turq. (3.97 mm)						
Flow (gpm)	3.82	4.13	4.41	4.68	4.93	5.17	Flow (L/hr)	868	938	1002	1063	1120	1174
Radius at 1.5 ft ht (ft)	41	43	44	45	45	46	Radius at 0.46 m ht (m)	12.5	13.1	13.4	13.7	13.7	14.0

4123 PART-CIRCLE EFFLUENT PERFORMANCE DATA

SPRINKLER BASE PRESSURE-US	psi						SPRINKLER BASE PRESSURE-METRIC	bar					
	30	35	40	45	50	55		2.07	2.42	2.76	3.11	3.45	3.79
#10 Nozzle - Turquoise (5/32")							#10 Nozzle - Turquoise (3.97 mm)						
Flow (gpm)	3.82	4.13	4.41	4.68	4.93	5.17	Flow (L/hr)	868	938	1002	1063	1120	1174
Radius at 1.5 ft ht (ft)	42	43	44	45	45	46	Radius at 0.46 m ht (m)	12.8	13.1	13.4	13.7	13.7	14.0
#11 Nozzle - Yellow (11/64")							#11 Nozzle - Yellow (4.37 mm)						
Flow (gpm)	4.63	5.00	5.34	5.67	5.98	6.27	Flow (L/hr)	1052	1136	1213	1288	1358	1424
Radius at 1.5 ft ht (ft)	44	45	46	47	48	48	Radius at 0.46 m ht (m)	13.3	13.7	14.0	14.3	14.5	14.6
#12 Nozzle - Red (3/16")							#12 Nozzle - Red (4.76 mm)						
Flow (gpm)	5.52	5.97	6.37	6.76	7.13	7.48	Flow (L/hr)	1254	1356	1447	1535	1619	1699
Radius at 1.5 ft ht (ft)	45	46	48	49	50	51	Radius at 0.46 m ht (m)	13.6	14.0	14.5	14.9	15.2	15.4
#13 Nozzle - White (13/64")							#13 Nozzle - White (5.16 mm)						
Flow (gpm)	6.50	7.02	7.49	7.95	8.38	8.80	Flow (L/hr)	1476	1594	1701	1806	1903	1999
Radius at 1.5 ft ht (ft)	45	47	48	50	51	51	Radius at 0.46 m ht (m)	13.7	14.2	14.6	15.1	15.4	15.5

Sprinkler performance may vary with actual field conditions. Radius shown is for standard straight bore nozzles and stream straightening vanes. Stream heights range from 6.0 to 10.0 ft (1.8 to 3.1 m) above nozzle based on pressure nozzle size.

Part-Circle

5123 PART-CIRCLE EFFLUENT PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi						SPRINKLER INLET PRESSURE-METRIC	bar					
	30	35	40	45	50	55		2.07	2.42	2.76	3.11	3.45	3.79
#13 Nozzle - White (13/64")							#13 Nozzle - White (5.16 mm)						
Flow (gpm)	6.50	7.02	7.49	7.95	8.38	8.80	Flow (L/hr)	1476	1594	1701	1806	1903	1999
Radius at 1.5 ft ht (ft)	45	47	48	50	51	51	Radius at 0.46 m ht (m)	13.7	14.3	14.6	15.2	15.5	15.5
#14 Nozzle - Blue (7/32")							#14 Nozzle - Blue (5.56 mm)						
Flow (gpm)	7.49	8.09	8.63	9.17	9.66	10.1	Flow (L/hr)	1701	1837	1960	2083	2194	2294
Radius at 1.5 ft ht (ft)	46	47	49	50	51	52	Radius at 0.46 m ht (m)	14.0	14.3	14.9	15.2	15.5	15.8
#15 Nozzle - Dark Brown (15/64")							#15 Nozzle - Dark Brown (5.95 mm)						
Flow (gpm)	8.51	9.19	9.81	10.4	11.0	11.5	Flow (L/hr)	1933	2087	2228	2362	2498	2612
Radius at 1.5 ft ht (ft)	46	48	50	51	52	53	Radius at 0.46 m ht (m)	14.0	14.6	15.2	15.5	15.8	16.2
#16 Nozzle - Orange (1/4")							#16 Nozzle - Orange (6.35 mm)						
Flow (gpm)	9.63	10.4	11.1	11.8	12.4	13.0	Flow (L/hr)	2187	2362	2521	2680	2816	2953
Radius at 1.5 ft ht (ft)	47	50	51	53	54	55	Radius at 0.46 m ht (m)	14.3	15.2	15.5	16.2	16.5	16.8
#17 Nozzle - Dark Green (17/64")							#17 Nozzle - Dark Green (6.75 mm)						
Flow (gpm)	10.7	11.6	12.3	13.1	13.8	14.5	Flow (L/hr)	2430	2635	2794	2975	3134	3293
Radius at 1.5 ft ht (ft)	47	50	52	54	55	56	Radius at 0.46 m ht (m)	14.3	15.2	15.8	16.5	16.8	17.1
#18 Nozzle - Purple (9/32")							#18 Nozzle - Purple (7.14 mm)						
Flow (gpm)	11.9	12.9	13.7	14.6	15.4	16.1	Flow (L/hr)	2703	2903	3112	3316	3498	3657
Radius at 1.5 ft ht (ft)	47	50	53	55	56	57	Radius at 0.46 m ht (m)	14.3	15.2	16.2	16.8	17.1	17.4

Sprinkler performance may vary with actual field conditions. Radius shown is for standard straight bore nozzles and stream straightening vanes. Stream heights range from 6.0 to 10.0 ft (1.8 to 3.1 m) above nozzle based on pressure nozzle size.

7125 PART-CIRCLE EFFLUENT PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi				SPRINKLER INLET PRESSURE-METRIC	bar			
	40	50	60	70		2.76	3.45	4.14	4.83
#14 Nozzle (7/32")					#14 Nozzle (5.56 mm)				
Flow (gpm)	9.20	10.1	10.9	11.8	Flow (L/hr)	2090	2294	2476	2680
Radius at 1.5 ft ht (ft)	57	58	60	63	Radius at 0.46 m ht (m)	17.4	17.7	18.3	19.2
#16 Nozzle (1/4")					#16 Nozzle (6.35 mm)				
Flow (gpm)	11.1	12.3	13.5	14.8	Flow (L/hr)	2521	2794	3066	3361
Radius at 1.5 ft ht (ft)	59	61	65	66	Radius at 0.46 m ht (m)	18.0	18.6	19.8	20.1
#18 Nozzle (9/32")					#18 Nozzle (7.14 mm)				
Flow (gpm)	13.3	15.2	16.6	18.0	Flow (L/hr)	3021	3452	3770	4088
Radius at 1.5 ft ht (ft)	61	63	67	68	Radius at 0.46 m ht (m)	18.6	19.2	20.4	20.7
#20 Nozzle (5/16")					#20 Nozzle (7.94 mm)				
Flow (gpm)	16.4	18.1	19.8	21.9	Flow (L/hr)	3725	4111	4497	4974
Radius	64	69	73	77	Radius at 0.46 m ht (m)	19.5	21.0	22.3	23.5
#22 Nozzle (11/32")					#22 Nozzle (8.73 mm)				
Flow (gpm)	19.0	21.3	23.0	25.4	Flow (L/hr)	4315	4838	5224	5769
Radius at 1.5 ft ht (ft)	67	72	75	80	Radius at 0.46 m ht (m)	20.4	21.9	22.9	29.4
#24 Nozzle (3/8")					#24 Nozzle (9.53 mm)				
Flow (gpm)	23.0	24.4	27.9	31.0	Flow (L/hr)	5224	5542	6337	7041
Radius at 1.5 ft ht (ft)	68	73	77	81	Radius at 0.46 m ht (m)	20.7	22.3	23.5	24.7

Sprinkler performance may vary with actual field conditions. Radii shown are for standard straight bore nozzles and stream straightening vanes. Stream heights range from 8.5 to 15.5 ft (2.6 to 4.7 m) above nozzle based on pressure and nozzle size.



FEATURES

- Distributes water in a 20° to 350° adjustable pattern, no tools needed
- Can be converted to full-circle operation
- Covered reversing mechanism
- 25° nozzle trajectory for maximum radius of throw
- Connection: 1" male NPT
- Flow range: 9.20 to 31.0 gpm (2090 to 7041 L/hr)
- Operating pressures: 40 to 70 psi (2.76 to 4.83 bar)

Dust Suppression




Sprinklers are often used for dust suppression by applying water that penetrates the ground to 1.5 and 2 ft (0.5 and 0.61 m). This can reduce the number of particles generated by as much as 95%. Additionally, the water droplets intercept dust particles mid-air pulling them down to the ground.

Roadways

Senninger® Part-Circle sprinklers are used along roadways to minimize dust and improve visibility for trucks and equipment. Minimizing dust helps reduce the need to wash equipment windshields as often.

Mine Perimeter

Sprinkler systems can be used to help create a barrier along the mine perimeter to help reduce dust migration.

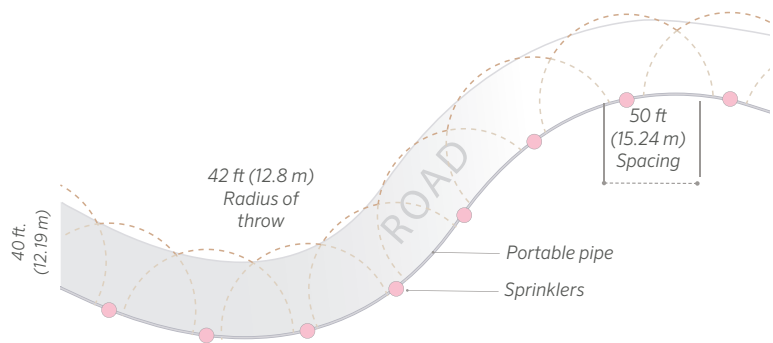

LAYOUT EXAMPLE

Sprinkler	Indicated by	●
Model	3123 Part-Circle; nozzle #9 (9/64")	
Note	Pressure regulator recommended at 40 psi (2.76 bar)	
Radius	42 ft (12.8 m)	
Flow	3.56 gpm (809 L/hr)	

Advantages of sprinklers over other dust suppression technologies

- Reduce water use by up to 90% over traditional dust control methods.
- Use less energy and require less maintenance than traditional methodologies.
- Reduce the carbon footprint associated with costly mobile watering systems.
- Improve efficiency when connected to controllers to automate scheduled run times.
- Reduce traffic dust on mining roads and help improve overall daily operating conditions.
- Help reduce scheduled truck and equipment maintenance.



80 Series

Flow: 25.2 to 88.7 gpm (5724 to 20146 L/hr)
Pressure: 40 to 70 psi (2.76 to 4.83 bar)




FEATURES

- Splash arm spring and bearing enclosed for better resistance to corrosion and environmental extremes
- Constructed of engineering-grade thermoplastics and specially selected stainless-steel components for excellent corrosion resistance
- Heavy-duty design to withstand rugged mining conditions
- Single-nozzle design provides greater resistance to clogging
- Double-nozzle design also available for greater uniformity
- Inlet sizes: 1 1/4" NPT male or female, 1 1/2" NPT male, 1 1/4" BSPT male



Installation Option

Impact sprinklers that are mounted onto a riser should be stabilized to counteract the sprinkler's thrust. When using risers in gold and silver mining, use carbon steel or stainless-steel pipe. When using risers in acid copper leaching, use stainless-steel pipe.

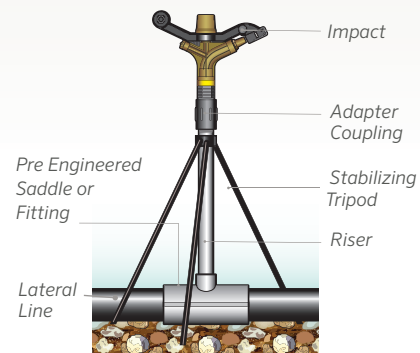

80 Series

8025 CMS IMPACT SPRINKLER PERFORMANCE DATA 1 ¼" & 1 ½" NPT

SPRINKLER INLET PRESSURE-US	psi				SPRINKLER INLET PRESSURE-US	bar			
	40	50	60	70		2.76	3.45	4.14	4.83
#24 Nozzle - (3/8")					#24 Nozzle - (9.53 mm)				
Flow (gpm)	25.2	28.2	30.9	33.3	Flow (L/hr)	5724	6405	7018	7563
Diameter at 1.5 ft ht (ft)	134	144	154	159	Diameter at 0.46 m ht (m)	41	44	47	48
#26 Nozzle - (13/32")					#26 Nozzle - (10.32 mm)				
Flow (gpm)	29.3	32.7	35.9	38.7	Flow (L/hr)	6655	7427	8154	8790
Diameter at 1.5 ft ht (ft)	142	152	161	166	Diameter at 0.46 m ht (m)	43	46	49	51
#28 Nozzle - (7/16")					#28 Nozzle - (11.11 mm)				
Flow (gpm)	33.9	38.0	41.6	44.9	Flow (L/hr)	7700	8631	9448	10198
Diameter at 1.5 ft ht (ft)	148	157	166	171	Diameter at 0.46 m ht (m)	45	48	51	52
#30 Nozzle - (15/32")					#30 Nozzle - (11.91 mm)				
Flow (gpm)	38.6	43.1	47.2	51.0	Flow (L/hr)	8767	9789	10720	11583
Diameter at 1.5 ft ht (ft)	153	162	170	175	Diameter at 0.46 m ht (m)	47	49	52	53
#32 Nozzle - (1/2")					#32 Nozzle - (12.7 mm)				
Flow (gpm)	43.9	49.0	53.7	58.0	Flow (L/hr)	9971	11129	12197	13173
Diameter at 1.5 ft ht (ft)	156	165	173	179	Diameter at 0.46 m ht (m)	48	50	53	55
#34 Nozzle - (17/32")					#34 Nozzle - (13.49 mm)				
Flow (gpm)	49.5	55.4	60.7	65.5	Flow (L/hr)	11243	12583	13786	14877
Diameter at 1.5 ft ht (ft)	159	168	176	183	Diameter at 0.46 m ht (m)	48	51	54	56
#36 Nozzle - (9/16")					#36 Nozzle - (14.29 mm)				
Flow (gpm)	55.5	62.1	68.0	73.5	Flow (L/hr)	12605	14104	15444	16694
Diameter at 1.5 ft ht (ft)	161	170	178	187	Diameter at 0.46 m ht (m)	49	52	54	57
#38 Nozzle - (19/32")					#38 Nozzle - (15.08 mm)				
Flow (gpm)	59.9	66.9	73.3	79.2	Flow (L/hr)	13605	15195	16648	17988
Diameter at 1.5 ft ht (ft)	163	172	180	190	Diameter at 0.46 m ht (m)	50	52	55	58
#40 Nozzle - (5/8")					#40 Nozzle - (15.88 mm)				
Flow (gpm)	67.1	75.0	82.1	88.7	Flow (L/hr)	15240	17034	18647	20146
Diameter at 1.5 ft ht (ft)	165	174	182	192	Diameter at 0.46 m ht (m)	50	53	55	59

Sprinkler performance may vary with actual field conditions. Diameters shown are for standard straight bore nozzles and stream-straightening vanes (black). Stream heights range from 12.5 to 28.0 ft (3.8 to 8.5 m) above nozzle based on pressure and nozzle size.

Super Spray®

Flow: 2.75 to 8.79 gpm (625 to 1996 L/hr)
Pressure: 15 to 30 psi (1.04 to 2.07 bar)



Deflector Pads

- Evaporation (black)
- Flat Smooth (black)




Easy Clean Nozzle Design

Just pinch and pull to remove the nozzle then place and click to re-install. No need to disassemble or remove the sprinkler. Nozzle sizes are easily identifiable with color-coding and embossing on the ears, including half sizes (orifice diameters in 1/28 inch increments).

FEATURES

- No moving parts for longer life
- Built for strength and durability using high-impact engineering-grade thermoplastics
- Interchangeable deflector pads to customize spray angle and droplet size
- Easy clean nozzle, color coded by size
- Inlet size: 3/4" NPT male

STREAM HEIGHT ABOVE SPRAY PAD

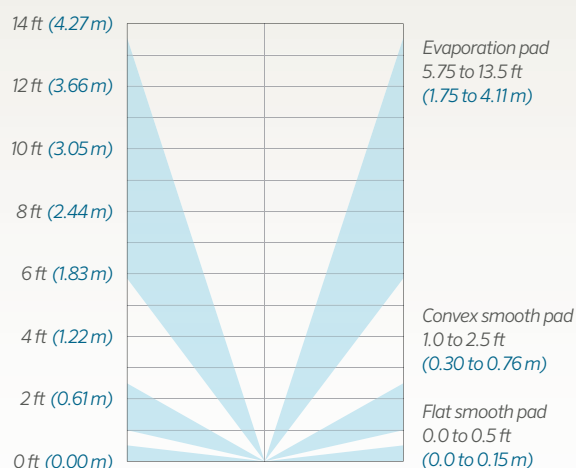

Evaporation results will vary depending on wind, temperature, humidity and other factors. These variables must be considered when calculating evaporative performance.

Super Spray®



Super Spray® for Evaporation

To help decrease the water in the tailings and storage dams, especially in regions or seasons of high rainfall, sprinklers can help evaporate solutions.

The Senninger® Super Spray sprinkler uses less energy and requires less maintenance than traditional methodologies. These sprinklers can be connected to controllers to schedule run times that best suit mining operations.

SUPER SPRAY PERFORMANCE DATA

SPRINKLER INLET PRESSURE-US	psi				SPRINKLER INLET PRESSURE-METRIC	bar			
	15	20	25	30		1.04	1.38	1.73	2.07
#10 Nozzle - Turquoise (5/32")					#10 Nozzle - Turquoise (3.97 mm)				
Flow (gpm)	2.75	3.17	3.55	3.88	Flow (L/hr)	625	720	806	881
Evaporation Pad - Diameter at 1.5 ft ht (ft)	22.0	24.0	25.0	25.0	Evaporation Pad- Diameter at 0.46 m ht (m)	6.7	7.3	7.6	7.6
Convex-Smooth Pad - Diameter at 1.5 ft ht (ft)	24.5	28.5	31.5	31.5	Convex-Smooth Pad - Diameter at 0.46 m ht (m)	7.5	8.7	9.6	9.6
Flat-Smooth Pad - Diameter at 1.5 ft ht (ft)	22.0	24.0	26.0	27.0	Flat-Smooth Pad - Diameter at 0.46 m ht (m)	6.7	7.3	7.9	8.2
#11 Nozzle - Yellow (11/64")					#11 Nozzle - Yellow (4.37 mm)				
Flow (gpm)	3.33	3.84	4.30	4.71	Flow (L/hr)	756	872	977	1070
Evaporation Pad - Diameter at 1.5 ft ht (ft)	23.5	25.5	26.0	25.5	Evaporation Pad- Diameter at 0.46 m ht (m)	7.2	7.8	7.9	7.8
Convex-Smooth Pad - Diameter at 1.5 ft ht (ft)	26.5	30.5	33.5	33.5	Convex-Smooth Pad - Diameter at 0.46 m ht (m)	8.1	9.3	10.2	10.2
Flat-Smooth Pad - Diameter at 1.5 ft ht (ft)	22.5	24.5	26.5	27.5	Flat-Smooth Pad - Diameter at 0.46 m ht (m)	6.9	7.5	8.1	8.4
#12 Nozzle - Red (3/16")					#12 Nozzle - Red (4.76 mm)				
Flow (gpm)	3.97	4.58	5.12	5.61	Flow (L/hr)	902	1040	1163	1274
Evaporation Pad - Diameter at 1.5 ft ht (ft)	25.0	27.0	27.0	26.0	Evaporation Pad- Diameter at 0.46 m ht (m)	7.6	8.2	8.2	7.9
Convex-Smooth Pad - Diameter at 1.5 ft ht (ft)	28.0	32.0	35.0	35.0	Convex-Smooth Pad - Diameter at 0.46 m ht (m)	8.5	9.8	10.7	10.7
Flat-Smooth Pad - Diameter at 1.5 ft ht (ft)	23.0	25.0	27.0	28.0	Flat-Smooth Pad - Diameter at 0.46 m ht (m)	7.0	7.6	8.2	8.5
#13 Nozzle - White (13/64")					#13 Nozzle - White (5.16 mm)				
Flow (gpm)	4.66	5.38	6.02	6.59	Flow (L/hr)	1058	1222	1367	1497
Evaporation Pad - Diameter at 1.5 ft ht (ft)	26.5	28.5	28.0	26.5	Evaporation Pad- Diameter at 0.46 m ht (m)	8.1	8.7	8.5	8.1
Convex-Smooth Pad - Diameter at 1.5 ft ht (ft)	29.5	33.5	36.0	36.0	Convex-Smooth Pad - Diameter at 0.46 m ht (m)	9.0	10.2	11.0	11.0
Flat-Smooth Pad - Diameter at 1.5 ft ht (ft)	23.5	25.5	27.5	28.5	Flat-Smooth Pad - Diameter at 0.46 m ht (m)	7.2	7.8	8.3	8.7
#14 Nozzle - Blue (7/32")					#14 Nozzle - Blue (5.56 mm)				
Flow (gpm)	5.41	6.25	6.99	7.65	Flow (L/hr)	1229	1420	1588	1738
Evaporation Pad - Diameter at 1.5 ft ht (ft)	28.0	29.5	28.5	27.0	Evaporation Pad- Diameter at 0.46 m ht (m)	8.5	9.0	8.7	8.2
Convex-Smooth Pad - Diameter at 1.5 ft ht (ft)	31.0	35.0	37.0	37.0	Convex-Smooth Pad - Diameter at 0.46 m ht (m)	9.5	10.7	11.3	11.3
Flat-Smooth Pad - Diameter at 1.5 ft ht (ft)	23.5	26.0	28.0	29.0	Flat-Smooth Pad - Diameter at 0.46 m ht (m)	7.2	7.9	8.5	8.8
#15 Nozzle - Dark Brown (15/64")					#15 Nozzle - Dark Brown (5.95 mm)				
Flow (gpm)	6.22	7.18	8.03	8.79	Flow (L/hr)	1413	1631	1824	1996
Evaporation Pad - Diameter at 1.5 ft ht (ft)	29.0	30.0	29.0	27.5	Evaporation Pad- Diameter at 0.46 m ht (m)	8.8	9.2	8.8	8.4
Convex-Smooth Pad - Diameter at 1.5 ft ht (ft)	32.0	36.0	38.0	38.0	Convex-Smooth Pad - Diameter at 0.46 m ht (m)	9.8	11.0	11.6	11.6
Flat-Smooth Pad - Diameter at 1.5 ft ht (ft)	24.0	26.5	28.5	29.5	Flat-Smooth Pad - Diameter at 0.46 m ht (m)	7.3	8.1	8.7	9.0

Sprinkler performance may vary with actual field conditions. Other nozzle sizes are available. Consult factory for specific performance data.

Pressure Regulation Overview

Pressure regulators help ensure proper sprinkler performance by controlling excessive and varying inlet pressure to constant outlet pressure. This helps maintain the sprinkler's pattern and application uniformity to maintain the overall efficiency of the application system.

FEATURES

- Constructed out of high-impact thermoplastics with a stainless-steel compression spring
- Pressure tested to ensure quality and performance
- Very low hysteresis and friction loss
- Several models available based on pressures, flow range, and connection options



Every irrigation system experiences pressure fluctuations resulting in unwanted flow deviations and over and under-leaching. These fluctuations occur with elevation changes within the irrigated area, pressure loss through pipes and fittings, fluctuations when zones cycle on or off, system demand change on large projects with multiple water sources, and activation of large water guns.



	PRMP	PRL	PMR-MF
Flow Range	0.5 – 7 gpm (114 – 1590 L/hr)	0.5 – 8 gpm (114 – 1817 L/hr)	2 – 20 gpm (454 – 4542 L/hr)
Preset Operating Pressure	10 – 40 psi (0.69 – 2.76 bar)	6 – 40 psi (0.41 – 2.76 bar)	6 – 60 psi (0.41 – 4.14 bar)
Maximum Inlet Pressure	120 psi (8.27 bar)	120 psi (8.27 bar)	140 psi (9.65 bar)
Inlet Sizes	¾" F hose, ¾" F NPT, tape barb, 500 barb, 600 barb	¾" F hose, ¾" F NPT, tape barb, 500 barb, 600 barb	¾" F NPT, 1" F NPT, 1" F BSPT
Outlet Sizes	¾" M hose, ¾" M NPT, tape barb, 500 barb, 600 barb	¾" M hose, ¾" M NPT, tape barb, 500 barb, 600 barb	¾" F NPT, 1" F NPT, 1" F BSPT




PR-HF	PRU	PRLV	PRU-LV
10 – 32 gpm (2271 – 7268 L/hr)	20 – 100 gpm (4542 – 22713 L/hr)	up to 18 gpm (up to 4088 L/hr)	up to 100 gpm (up to 22713 L/hr)
10 – 50 psi (0.69 – 3.45 bar)	10 – 60 psi (0.69 – 4.14 bar)	30 – 60 psi (2.07 – 4.14 bar)	10 – 60 psi (0.69 – 4.14 bar)
130 psi (8.96 bar)	140 psi (9.65 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)
1 ¼" F NPT, 1 ¼" F BSPT	2" F NPT, 2" F BSPT	¾" F NPT, 1" F NPT	2" F NPT, 2" F BSPT
1" F NPT, 1" F BSPT, 1 ¼" F NPT, 1 ¼" F BSPT	2" F NPT, 2" F BSPT	¾" F NPT, 1" F NPT	2" F NPT, 2" F BSPT

Overview Pressure Regulation


HOW DO PRESSURE REGULATORS WORK?

Water travels through the inlet of the regulator across a fixed seat into the critical flow area. Water then enters a hollow cylinder or throttling stem attached to a diaphragm. Increasing inlet pressure causes the valve to close. Decreasing inlet pressure allows the valve to open. The regulated outlet pressure is determined by the spring's compressive strength.

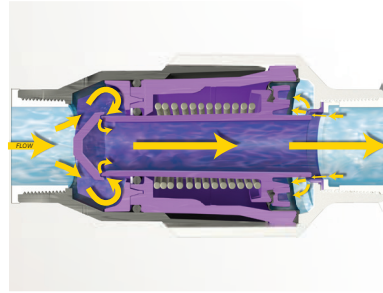


Dynamic Pressure Regulators

Dynamic pressure regulators must always be installed **downstream** from all shut-off valves and filters in the proper direction. Each model has a directional arrow on the side that shows the direction of the flow. This arrow should point downstream, toward the sprinklers and emitters.

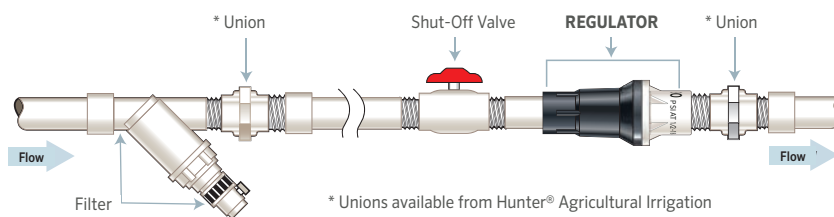

Static Pressure Regulators

Static pressure regulators, like our Pressure Regulating Limit Valve (PRLV and PRXF-LV) must always be installed **upstream** from all shut-off valves and filters in the proper direction. Each model has a directional arrow on the side that shows the direction of the flow. This arrow should point downstream, toward the sprinklers and emitters.

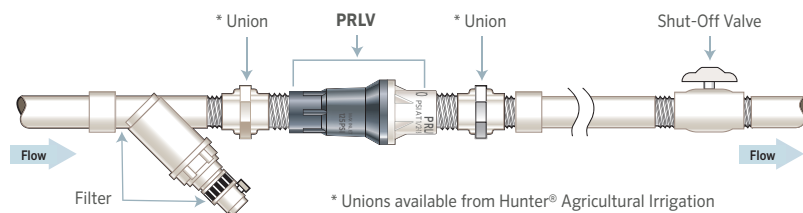


PRMP Pressure Regulator Mining Prospector

Flow: 0.5 to 7.0 gpm (114 to 1590 L/hr)
Pressure: 10 to 40 psi (0.69 to 2.76 bar)

FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Inlet sizes: 3/4" NPT female, 3/4" Hose female, tape lock barb (5/8"), 500 lock barb (16 mm), 600 lock barb (18 mm)
- Outlet sizes: 3/4" NPT male, 3/4" Hose male, tape lock barb (5/8"), 500 lock barb (16 mm), 600 lock barb (18 mm)
- Tamper-proof housing
- Very low hysteresis and friction losses
- Pressure-tested for accuracy
- No external metal parts for excellent
- Corrosion resistance

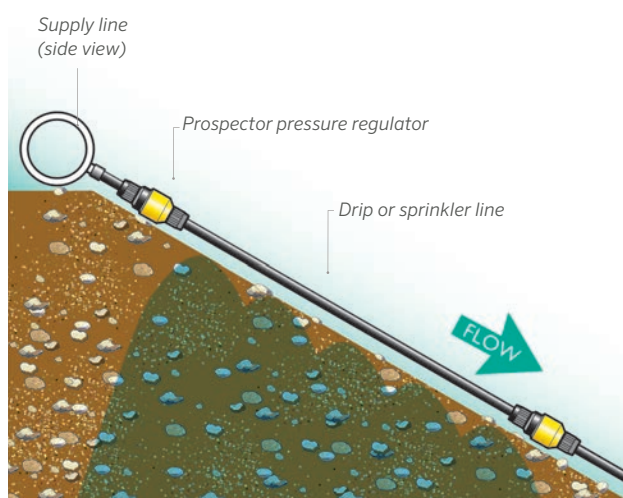

PRMP MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PRMP 10	10 psi (0.69 bar)	90 psi (6.20 bar)	0.5 - 7	114 - 1590
PRMP 15	15 psi (1.03 bar)	95 psi (6.55 bar)	0.5 - 7	114 - 1590
PRMP 20	20 psi (1.38 bar)	100 psi (6.89 bar)	0.5 - 7	114 - 1590
PRMP 25	25 psi (1.72 bar)	105 psi (7.24 bar)	0.5 - 7	114 - 1590
PRMP 30	30 psi (2.07 bar)	110 psi (7.58 bar)	0.5 - 7	114 - 1590
PRMP 35	35 psi (2.41 bar)	115 psi (7.93 bar)	0.5 - 7	114 - 1590
PRMP 40	40 psi (2.76 bar)	120 psi (8.27 bar)	0.5 - 7	114 - 1590
PRMP B TAPE 10	10 psi (0.69 bar)	25 psi (1.72 bar)	0.5 - 7	114 - 1590
PRMP B TAPE 15	15 psi (1.03 bar)	25 psi (1.72 bar)	0.5 - 7	114 - 1590
PRMP B 500 10	10 psi (0.69 bar)	50 psi (3.45 bar)	0.5 - 7	114 - 1590
PRMP B 500 15	15 psi (1.03 bar)	50 psi (3.45 bar)	0.5 - 7	114 - 1590
PRMP B 500 20	20 psi (1.38 bar)	50 psi (3.45 bar)	0.5 - 7	114 - 1590
PRMP B 600 10	10 psi (0.69 bar)	50 psi (3.45 bar)	0.5 - 7	114 - 1590
PRMP B 600 15	15 psi (1.03 bar)	50 psi (3.45 bar)	0.5 - 7	114 - 1590
PRMP B 600 20	20 psi (1.38 bar)	50 psi (3.45 bar)	0.5 - 7	114 - 1590


Spec sheets are available online at hunterirrigation.com/agriculture

The pressure regulator shall maintain the predetermined pressure provided that the inlet pressure is at least 5 psi (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown in this chart.

Pressure regulators should always be installed downstream of all shut-off valves.

Pressure Regulator Mining Prospector **PRMP**

PRMP Performance Curve

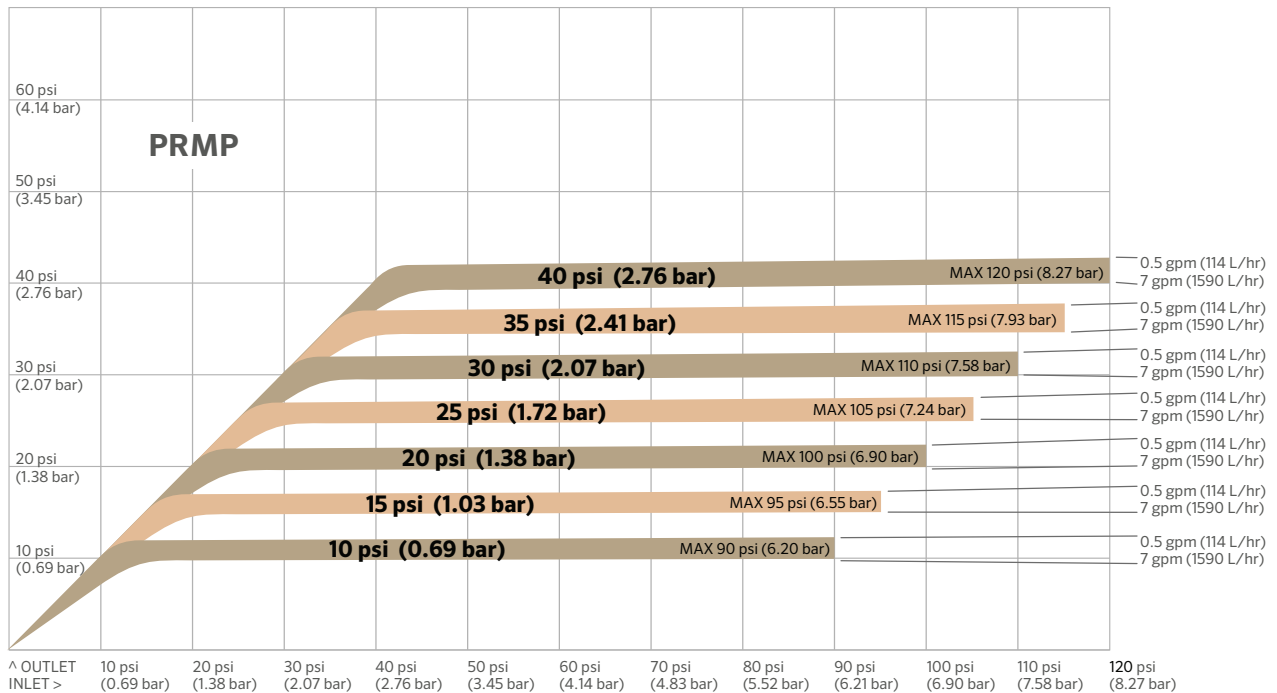

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PRMP will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.

In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (0.5 gpm or 114 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar). In contrast, at the highest flow (7 gpm or 1590 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.

PRL Pressure Regulator Low Flow

Flow: 0.5 to 8 gpm (114 to 1817 L/hr)
Pressure: 6 to 40 psi (0.41 to 2.76 bar)



FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Inlet sizes: 3/4" NPT female, 3/4" hose female
- Outlet sizes: 3/4" NPT female
- Tamper-proof housing
- Very low hysteresis and friction losses
- Pressure-tested for accuracy
- No external metal parts for excellent corrosion resistance

PRL-CMS MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PRL 6 CMS	6 psi (0.41 bar)	80 psi (5.51 bar)	0.5 - 5	114 - 1136
PRL 10 CMS	10 psi (0.69 bar)	90 psi (6.20 bar)	0.5 - 8	114 - 1817
PRL 12 CMS	12 psi (0.83 bar)	90 psi (6.20 bar)	0.5 - 8	114 - 1817
PRL 15 CMS	15 psi (1.03 bar)	95 psi (6.55 bar)	0.5 - 8	114 - 1817
PRL 20 CMS	20 psi (1.38 bar)	100 psi (6.89 bar)	0.5 - 8	114 - 1817
PRL 25 CMS	25 psi (1.72 bar)	105 psi (7.24 bar)	0.5 - 8	114 - 1817
PRL 30 CMS	30 psi (2.07 bar)	110 psi (7.58 bar)	0.5 - 8	114 - 1817
PRL 35 CMS	35 psi (2.41 bar)	115 psi (7.93 bar)	0.5 - 8	114 - 1817
PRL 40 CMS	40 psi (2.76 bar)	120 psi (8.27 bar)	0.5 - 8	114 - 1817


Spec sheets are available online at hunterirrigation.com/agriculture

The pressure regulator shall maintain the predetermined pressure provided that the inlet pressure is at least 5 psi (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown in this chart.

Pressure regulators should always be installed downstream of all shut-off valves.

Pressure Regulator Low Flow **PRL**

PRL Performance Curve

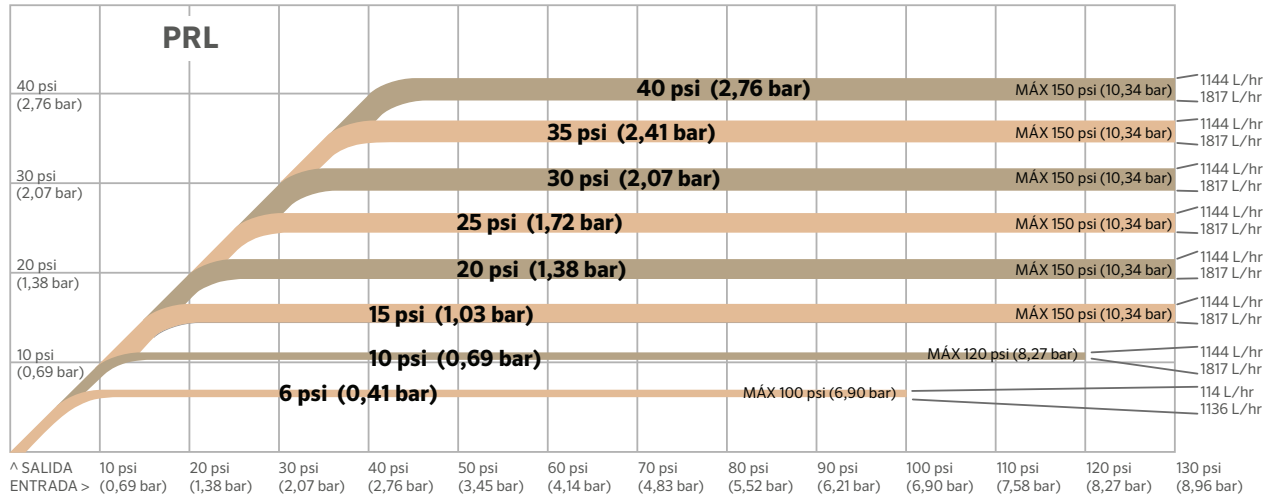

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PRL will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.

In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (0.5 gpm or 114 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar). In contrast, at the highest flow (8 gpm or 1817 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.

PMR-MF Pressure-Master Regulator™ Medium Flow

Flow: 2 to 20 gpm (454 to 4542 L/hr)
Pressure: 6 to 60 psi (0.41 to 4.14 bar)



FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Inlet sizes: 3/4" NPT female, 1" NPT female
- Outlet sizes: 3/4" NPT female, 1" NPT female
- Very low hysteresis and friction losses
- Pressure-tested for accuracy



PMR-MF-CMS MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PMR 6 MF CMS	6 psi (0.41 bar)	80 psi (5.51 bar)	4 - 16	909 - 3634
PMR 10 MF CMS	10 psi (0.69 bar)	90 psi (6.20 bar)	4 - 16	909 - 3634
PMR 12 MF CMS	12 psi (0.83 bar)	90 psi (6.20 bar)	2 - 20	454 - 4542
PMR 15 MF CMS	15 psi (1.03 bar)	95 psi (6.55 bar)	2 - 20	454 - 4542
PMR 20 MF CMS	20 psi (1.38 bar)	100 psi (6.89 bar)	2 - 20	454 - 4542
PMR 25 MF CMS	25 psi (1.72 bar)	105 psi (7.24 bar)	2 - 20	454 - 4542
PMR 30 MF CMS	30 psi (2.07 bar)	110 psi (7.58 bar)	2 - 20	454 - 4542
PMR 35 MF CMS	35 psi (2.41 bar)	115 psi (7.93 bar)	2 - 20	454 - 4542
PMR 40 MF CMS	40 psi (2.76 bar)	120 psi (8.27 bar)	2 - 20	454 - 4542
PMR 50 MF CMS	50 psi (3.45 bar)	130 psi (8.96 bar)	2 - 20	454 - 4542
PMR 60 MF CMS	60 psi (4.14 bar)	140 psi (9.65 bar)	2 - 20	454 - 4542


Spec sheets are available online at hunterirrigation.com/agriculture

The pressure regulator shall maintain the predetermined pressure provided that the inlet pressure is at least 5 psi (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown in this chart.

Pressure regulators should always be installed downstream of all shut-off valves.

Pressure-Master Regulator™ Medium Flow **PMR-MF**

PMR-MF Performance Curve

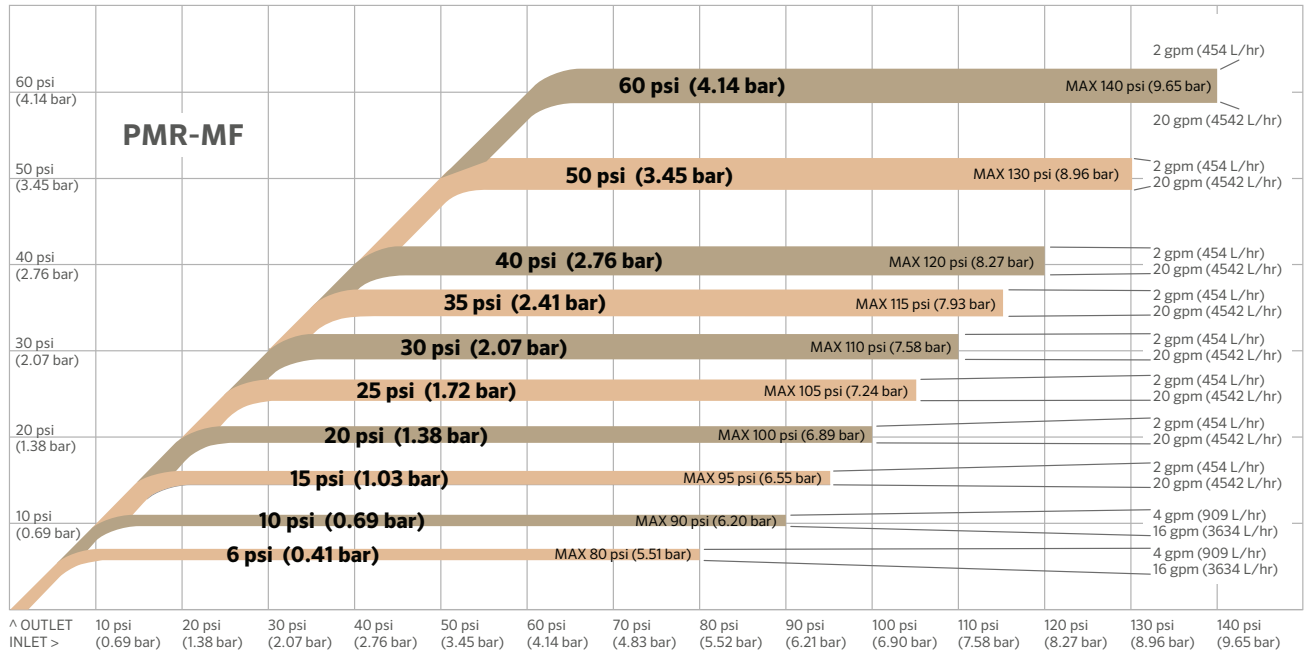

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PMR-MF will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.

In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (2 gpm or 454 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar).

In contrast, at the highest flow (20 gpm or 4542 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.

PR-HF Pressure Regulator High Flow

Flow: 10 to 32 gpm (2271 to 7268 L/hr)
Pressure: 10 to 50 psi (0.69 to 3.45 bar)

FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Large flow path resists plugging
- Inlet sizes: 1 1/4" NPT female, 1 1/4" F BSPT female
- Outlet sizes: 1" NPT female, 1" BSPT female, , 1 1/4" NPT female, 1 1/4" BSPT female
- Very low hysteresis and friction losses
- Pressure-tested for accuracy




PR-HF MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PR 10 HF	10 psi (0.69 bar)	90 psi (6.20 bar)	10 - 32	2271 - 7268
PR 15 HF	15 psi (1.03 bar)	95 psi (6.55 bar)	10 - 32	2271 - 7268
PR 20 HF	20 psi (1.38 bar)	100 psi (6.89 bar)	10 - 32	2271 - 7268
PR 25 HF	25 psi (1.72 bar)	105 psi (7.24 bar)	10 - 32	2271 - 7268
PR 30 HF	30 psi (2.07 bar)	110 psi (7.58 bar)	10 - 32	2271 - 7268
PR 40 HF	40 psi (2.76 bar)	120 psi (8.27 bar)	10 - 32	2271 - 7268
PR 50 HF	50 psi (3.45 bar)	130 psi (8.96 bar)	10 - 32	2271 - 7268

Spec sheets are available online at hunterirrigation.com/agriculture

The pressure regulator shall maintain the predetermined pressure provided that the inlet pressure is at least 5 psi (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown in this chart.

Pressure regulators should always be installed downstream of all shut-off valves.

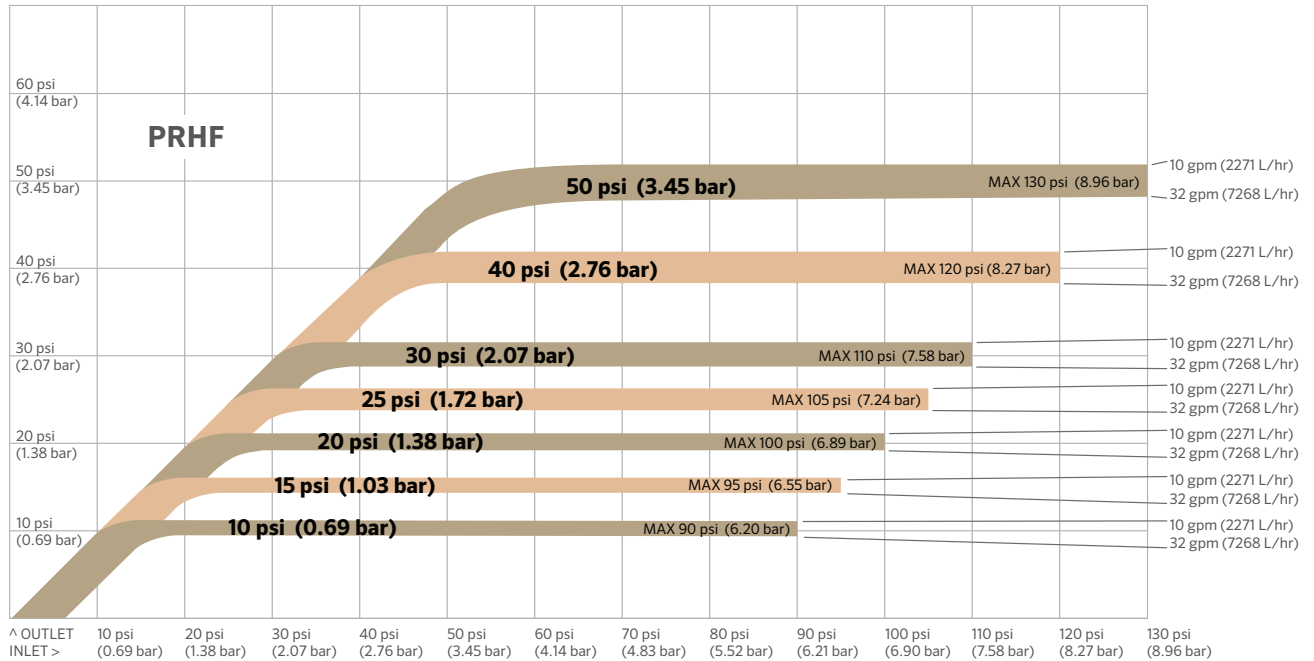Pressure Regulator High Flow **PR-HF****PR-HF Performance Curve**

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PR-HF will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.

In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (10 gpm or 2271 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar). In contrast, at the highest flow (32 gpm or 7268 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.

PRU Pressure Regulator Ultra Flow

Flow: 20 to 100 gpm (4542 to 22713 L/hr)
Pressure: 10 to 60 psi (0.69 to 4.14 bar)



FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Large flow path resists plugging
- Inlet sizes: 2" NPT female, 2" BSPT female.
- Outlet sizes: 2" NPT female, 2" BSPT female
- Tamper-proof housing
- Very low hysteresis and friction losses
- Pressure-tested for accuracy
- No external metal parts for excellent corrosion resistance

PRU MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PRU 10	10 psi (0.69 bar)	90 psi (6.20 bar)	20 - 100	4542 - 22713
PRU 15	15 psi (1.03 bar)	95 psi (6.55 bar)	20 - 100	4542 - 22713
PRU 20	20 psi (1.38 bar)	100 psi (6.89 bar)	20 - 100	4542 - 22713
PRU 25	25 psi (1.72 bar)	105 psi (7.24 bar)	20 - 100	4542 - 22713
PRU 30	30 psi (2.07 bar)	110 psi (7.58 bar)	20 - 100	4542 - 22713
PRU 40	40 psi (2.76 bar)	120 psi (8.27 bar)	20 - 100	4542 - 22713
PRU 50	50 psi (3.45 bar)	130 psi (8.96 bar)	20 - 100	4542 - 22713
PRU 60	60 psi (4.14 bar)	140 psi (9.65 bar)	20 - 100	4542 - 22713


Spec sheets are available online at hunterirrigation.com/agriculture

The pressure regulator shall maintain the predetermined pressure provided that the inlet pressure is at least 5 psi (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown in this chart.

Pressure regulators should always be installed downstream of all shut-off valves.

Pressure Regulator Ultra Flow **PRU**

PRU Performance Curve

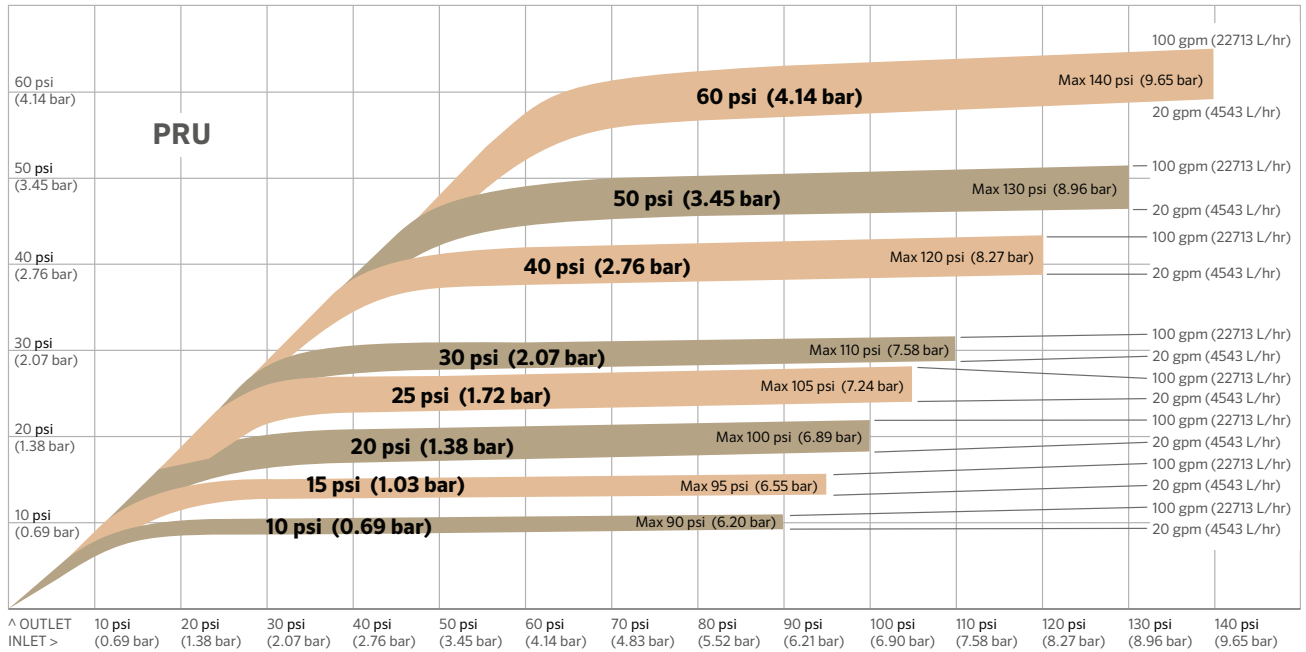

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PRU will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.

In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (20 gpm or 4543 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar). In contrast, at the highest flow (100 gpm or 22713 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.

PRLV Pressure Regulator Limit Valve

Flow: Up to 18 gpm (4088 L/hr)
Pressure: 10 to 60 psi (0.69 to 4.14 bar)

Pressure Regulating Limit Valves are designed to be used in place of standard pressure regulators to limit static (no flow) water pressure when a shut-off valve is used downstream from the regulation point. This limits downstream pressure and protects downstream components.




FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Limits downstream pressure to no more than 15 psi (1.03 bar) above regulated pressure rating during static (no flow) conditions
- Inlet sizes: 3/4" NPT female, 1" NPT female
- Outlet sizes: 3/4 " NPT female, 1" NPT female
- 100% pressure tested, to ensure quality and performance
- Very low hysteresis and friction losses

PRLV MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PRLV 10	10 psi (0.69 bar)	125 psi (8.62 bar)	up to 18	up to 4088
PRLV 15	15 psi (1.03 bar)	125 psi (8.62 bar)	up to 18	up to 4088
PRLV 20	20 psi (1.38 bar)	125 psi (8.62 bar)	up to 18	up to 4088
PRLV 30	30 psi (2.07 bar)	125 psi (8.62 bar)	up to 18	up to 4088
PRLV 40	40 psi (2.76 bar)	125 psi (8.62 bar)	up to 18	up to 4088
PRLV 50	50 psi (3.45 bar)	125 psi (8.62 bar)	up to 18	up to 4088
PRLV 60	60 psi (4.14 bar)	125 psi (8.62 bar)	up to 18	up to 4088

Pressure Regulator Limit Valve **PRLV**

PRLV Performance Curve

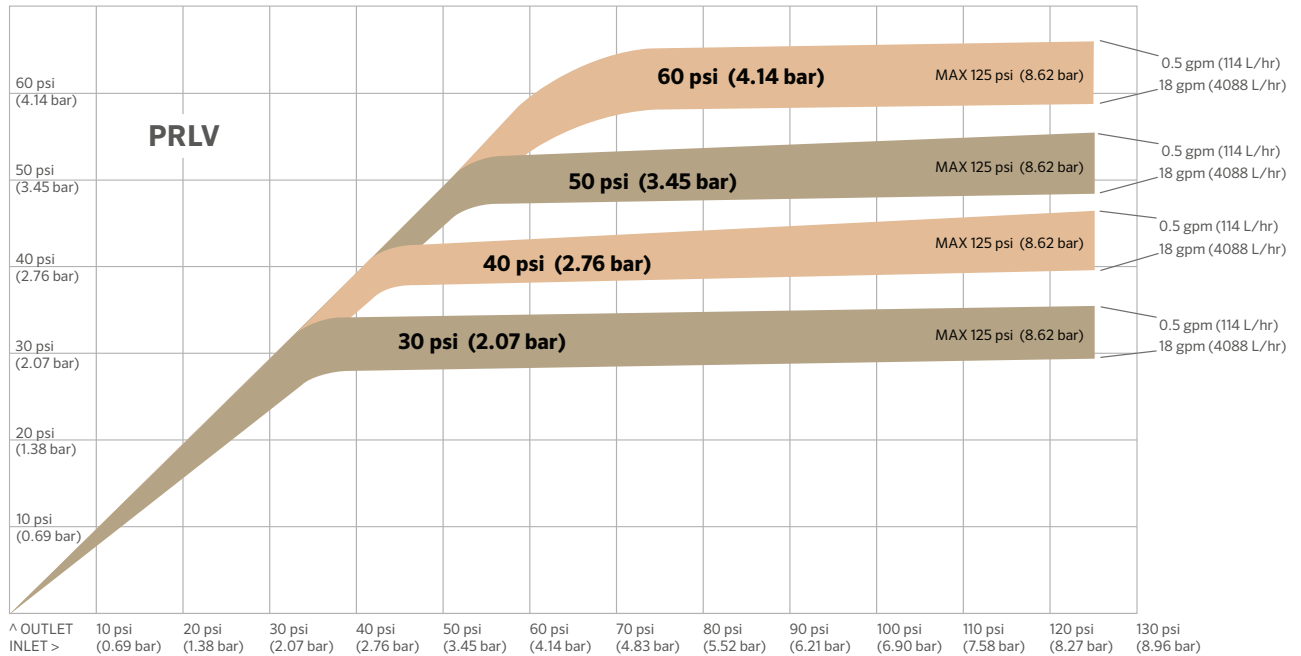

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PRLV will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.

In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (0.5 gpm or 114 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar). In contrast, at the highest flow (18 gpm or 4088 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.

PRU-LV Pressure Regulator Limit Valve

Flow: Up to 100 gpm (4542 to 22713 L/hr)
Pressure: 10 to 60 psi (0.69 to 4.14 bar)

FEATURES

- Maintains a constant preset outlet pressure while handling varying inlet pressures
- Limits downstream pressure to no more than 15 psi (1.03 bar) above regulated pressure rating during static (no flow) conditions
- Inlet sizes: 2" NPT female, 2" BSPT female
- Outlet sizes: 2" NPT female, 2" BSPT female
- 100% pressure tested for accuracy
- Very low hysteresis and friction losses



PRU -LV MODELS	Preset Outlet Pressure	Maximum Inlet Pressure	Flow Range	
			gpm	L/hr
PRU LV 10	10 psi (0.69 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 15	15 psi (1.03 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 20	20 psi (1.38 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 25	25 psi (1.72 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 30	30 psi (2.07 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 40	40 psi (2.76 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 50	50 psi (3.45 bar)	125 psi (8.62 bar)	up to 100	up to 22713
PRU LV 60	60 psi (4.14 bar)	125 psi (8.62 bar))	up to 100	up to 22713


Spec sheets are available online at hunterirrigation.com/agriculture

The PRU-LV limits downstream pressure to no more than 15 psi (1.03 bar) above regulated pressure during static (no flow) conditions..

Recommended for outdoor use only. Not NSF certified.

Pressure Regulating Ultra Limit Valve **PRU-LV**

PRU-LV Performance Curve

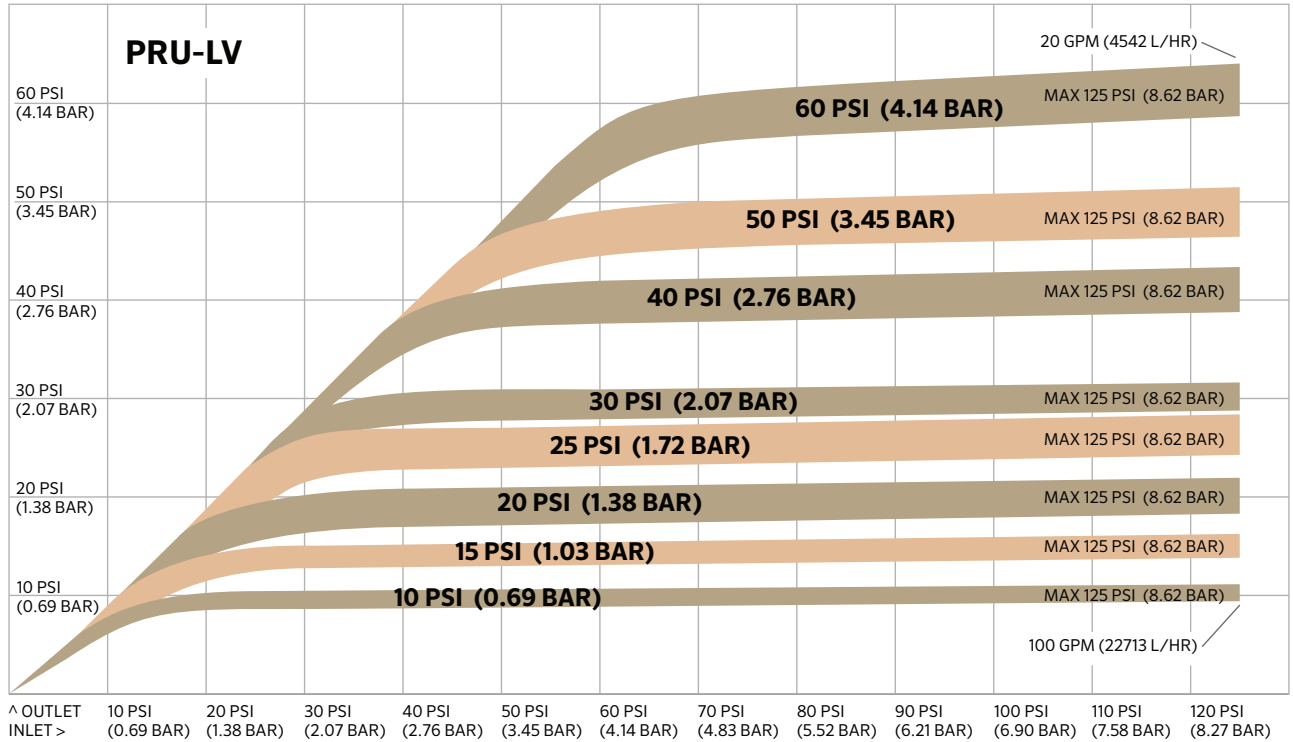

Every pressure regulator is designed to operate at a minimum and maximum inlet pressure and a predetermined flow range. This regulator performance curve illustrates how the PRU-LV will perform within the range of inlet pressures and flows.

The Y-axis shows outlet pressure, and the X-axis shows inlet pressure.



In this chart, the band for the 30 psi (2.07 bar) model shows the performance at various flows. At the lowest flow (20 gpm or 4542 L/hr), the regulator will maintain an actual outlet pressure slightly higher than 30 psi (2.07 bar). In contrast, at the highest flow (100 gpm or 22713 L/hr), the actual outlet pressure will be slightly lower than 30 psi (2.07 bar)*.

*Source: Rogers, Shaw, Pragada, & Alam, 2010.


Riser Adapter

The Senninger® Riser Adapter Assemblies make setting up irrigation systems easy. They allow specific sprinkler placement as recommended for optimum distribution with tubing connecting each to the closest lateral. They also allow the flexibility of relocating a sprinkler without disrupting its connection to the lateral.

LOWER FLOWS (Use with 0.270" I.D. tubing)

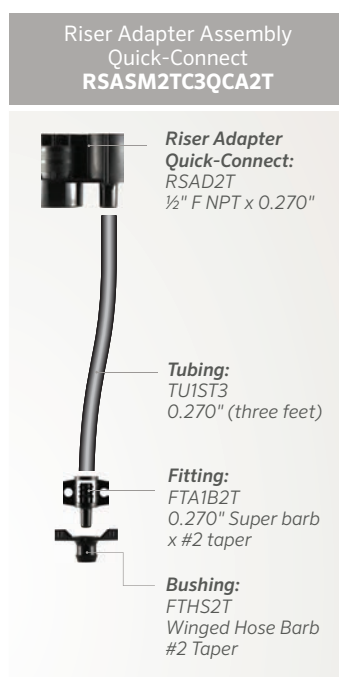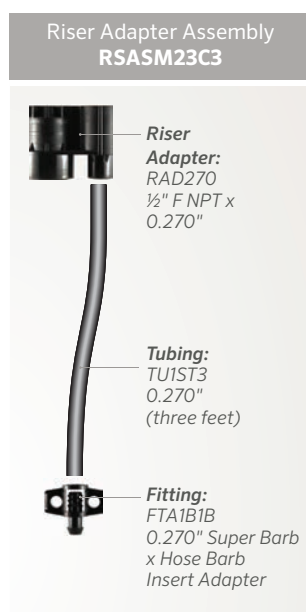

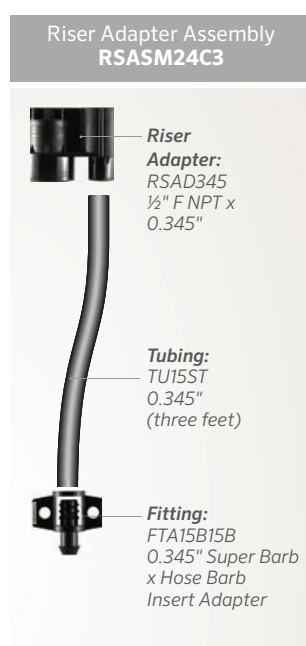


HIGHER FLOWS (Use with 0.345" I.D. tubing)



All four assemblies are available with other precut tubing lengths. Contact factory.

FITTINGS & BUSHINGS

-  **FTHS2T** - Fitting Winged Hose Barb Bushing for #2 Taper
-  **FTHS3T** - Fitting Winged Hose Barb Bushing for #3 Taper
-  **FT4HSC2T** - Fitting Barb Bushing Clamp for 1" Hose and #2 Taper
-  **FT1M2T** - Fitting Winged ¼" M NPT Threaded Bushing for #2 Taper
-  **FTPLUG2T** - Fitting Plug with #2 Taper (red)
-  **FTPLUG3T** - Fitting Plug with #3 Taper (maroon)

RISER STAKES

RSST26 - Riser Stake 26" with connection for Tubing or Riser Adapter

RSST14 - Riser Stake 14" with connection for Tubing or Riser Adapter

The assemblies can be mounted on ½" PVC risers or the Senninger 26" or 14" Riser Stakes.

TUBING PUNCH TOOLS

TUPTAP4I - Tubing Punch Tool for use with FTA1B1B (green handle)

TUPTAP5I - Tubing Punch Tool for use with FTA15B15B, FTHS2T, FTHS3T, FT1M2T, and FT4HSC2T (red handle)

Quick-Connect Coupling



The Quick-Connect Coupling provides installation versatility. It can be used along the lateral to make it easy to disassemble in manageable sections. It can also be installed on the riser to allow easy removal of the sprinkler.



1 inch



32 mm



1-1/4 inch



40 mm



TWO PIECE HOUSING THAT LOCKS TIGHTLY

FEATURES:


- Lightweight for easy portability
- Virtually leak-proof connection
- Four Models: 1-inch, 1 1/4-inch, 32 mm and 40 mm
- Constructed out of UV resistant thermoplastics

Installation Options

DESIGN CRITERIA

Pipe Diameter	Maximum Pressure	Part Number
1 inch	100 psi (7.0 bar)	QCPLASM4
1-1/4 inch	100 psi (7.0 bar)	QCPLASM5
32 mm	100 psi (7.0 bar)	QCPLASM32MM
40 mm	100 psi (7.0 bar)	QCPLASM40MM


BELOW THE SPRINKLER HEAD:

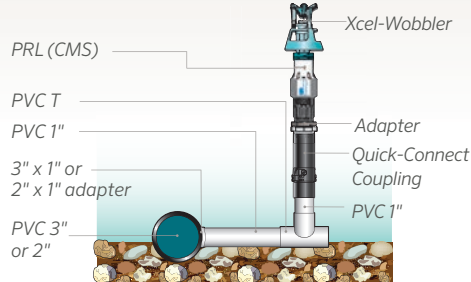

ATTACHING THE QUICK-CONNECT COUPLING


Apply glue to the outside of the pipe before inserting upper or lower housings. Once glue is dry, connect housings together by inserting the button on the lower housing into the tabbed area of the upper housing. Twist to lock.

ON LATERALS:

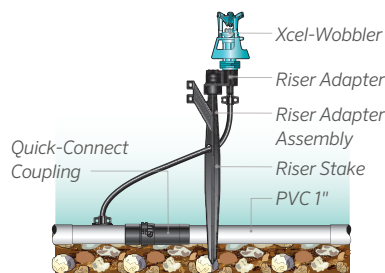

WinSIPP™ Custom Mining Software

The Senninger® WinSIPP™ software provides a visual comparison to help analyze various mining leaching installations. It compares different sprinklers, spacings, heights, operating pressures, and nozzle sizes to calculate the application rate and uniformity.

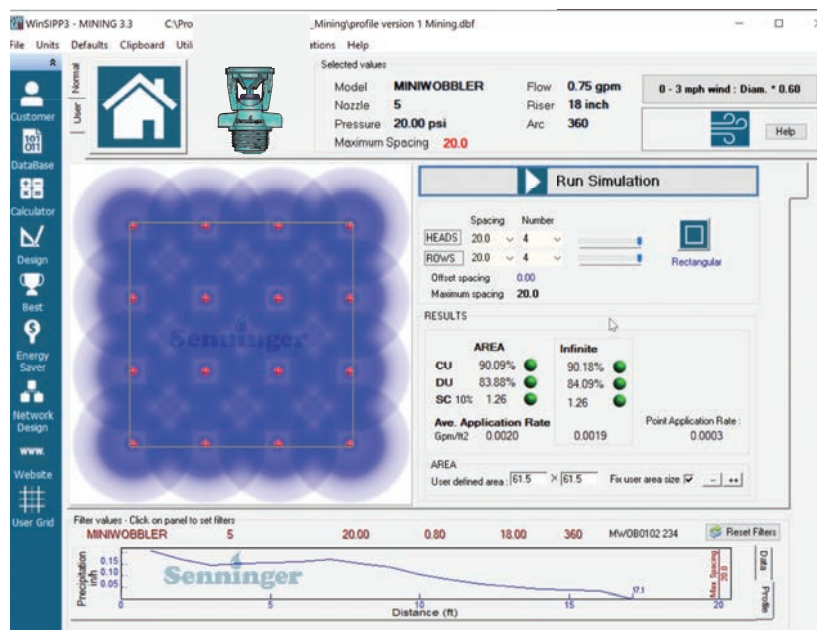

This installation has a CU of 90% and a DU of 84%. The SC is about 1.3, and the Average Application Rate is 0.002 gpm (0.43 L/hr).


The densogram shows the overlap of multiple sprinklers. In this example, a mini-Wobbler™ sprinkler with a #5 nozzle operating at 20 psi (1.38 bar) and installed on an 18" (46 cm) riser, at 20 x 20 ft (6 x 6 m) spacing.



Scan the QR code for more information about WinSIPP.


Custom Mining Software **WinSIPP™**

WinSIPP™ Mining Software allows designing a leaching pad from the selected sprinkler, obtaining as a result pressures in the sprinklers and valves, as well as the selection of pipe diameters based on flow velocities.

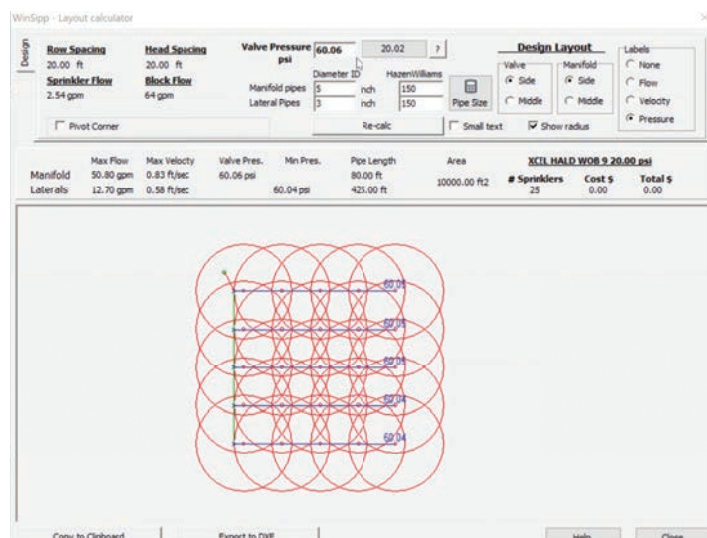

FEATURES

- Aids in the selection of the best sprinklers for each installation
- Tests the application uniformity of sprinkler layouts before the system is installed
- Compares different sprinklers, models, operating pressure, nozzle size/flow, riser height, spacing, layout, and area
- Illustrates the uniformity of overlapping sprinklers and the individual sprinkler profile for each scenario
- Calculates the application rate and scheduling coefficient for each set of parameters

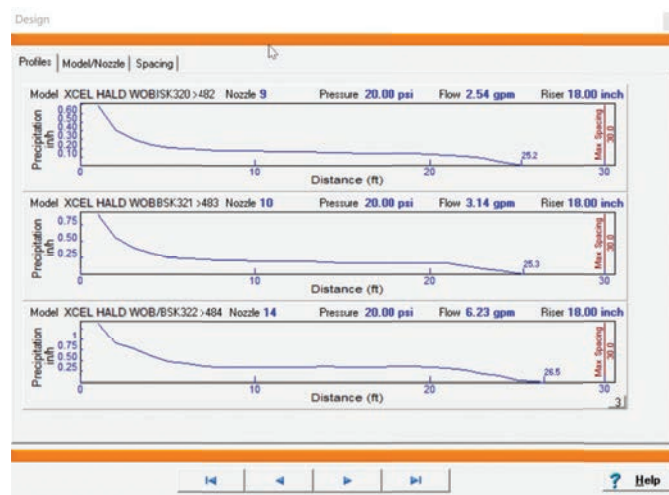

The sprinkler profiles show the amount of water delivered at various intervals and the sprinkler's radius of throw.



In this example, the radius of the Xcel-Wobbler™ is shown at three different nozzle sizes (#9, 10, and 14), with the sprinkler installed on an 18-inch (46 cm) riser and operating at 20 psi (1.38 bar). The flow and radius of throw change based on nozzle size.

IrriMaker

IrriMaker lets you design comprehensive irrigation projects ranging from large- to small-scale. It lets you evaluate installation alternatives in advance, survey any terrain, produce a contour plan, draw the details, produce a bill of materials, and send drawing results back to AutoCAD and Google Map


Irri-Maker has built-in CAD module that allows adding specific details to the contour plan like roads, fences, boundaries, and rivers, including text and bitmap images.

This software also operates within the larger Model Maker™ environment, which means, any of the other Model Maker modules can be added.

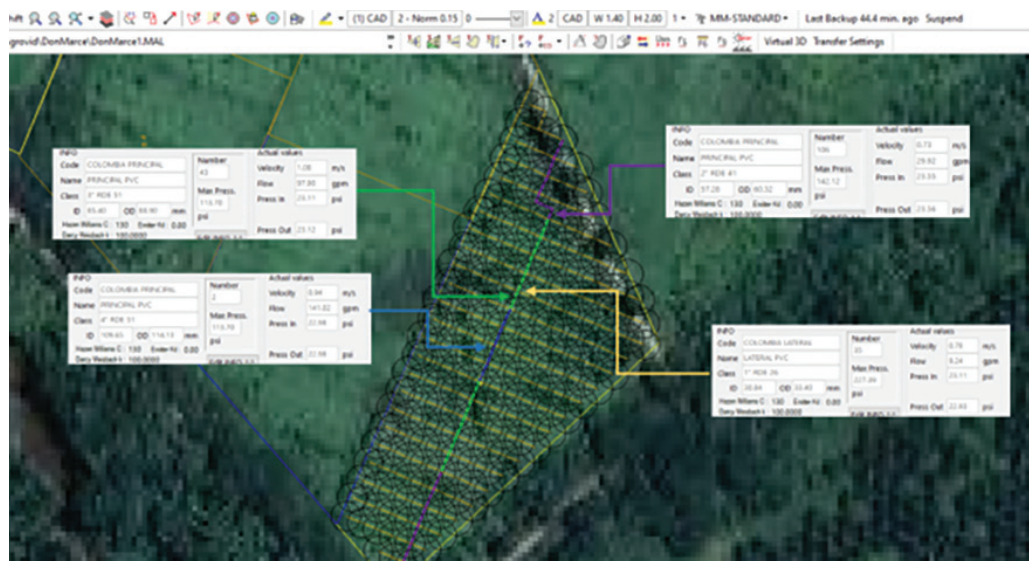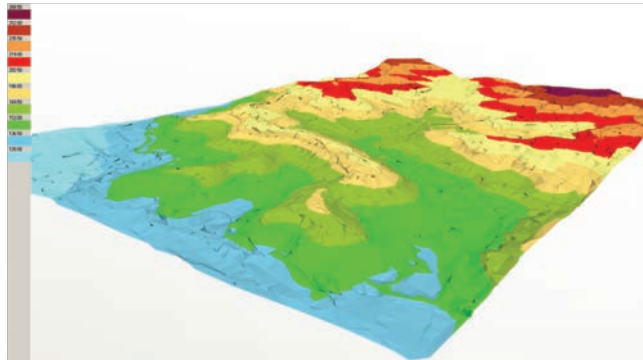

Scan the QR code for more information about IrriMaker.

IrriMaker

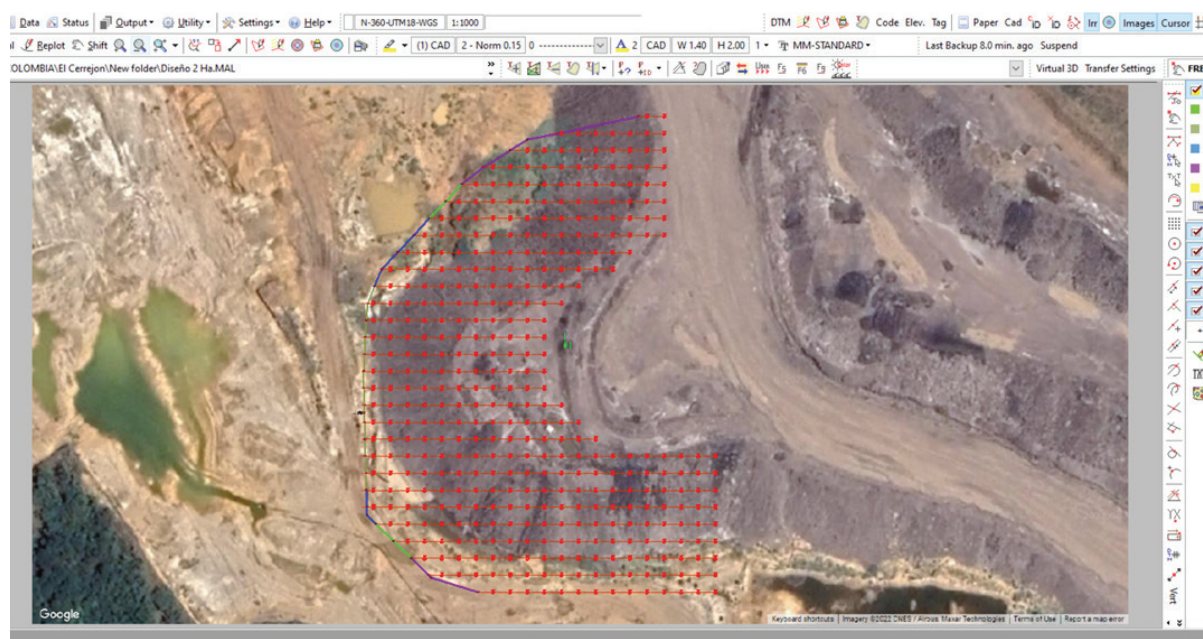

FEATURES

- All in one software package: combines surveyed data, CAD, Digital Terrain Modeling (DTM) and irrigation calculation functions
- Generates contour plans and 3D images illustrating the irrigation design in relation to slopes and elevations
- Calculate hydraulics, pressures, flows and quantities
- Full graphical control over each element of the design, including block areas, sprinklers, and pipes
- Saves time on repeatable routines
- Allows importation of information from many other programs

ADVANTAGES

GET MORE INSIGHTS FROM YOUR DESIGN

Get precise measurements, a complete bill of materials, and peace of mind with every design project.

DATA ENTRY

Enter data with manual surveys, or import your data from GPS collection easily

MODELING

Quickly create a surface model that you have complete control over.

DRAFTING

Produce fast and effective layouts, calculate hydraulics, size pipes and more with our CAD solution.

Nozzles

Senninger® nozzles are available in a variety of nozzle sizes to customize sprinklers for peak performance.

FEATURES

- Color-coded for easy size identification
- Excellent durability

Nozzle # Nozzle color	Nozzle Size US	Nozzle Size Metric
#4 Light Blue	1/16"	1.59 mm
#4.5 Light Blue	9/128"	1.78 mm
#5 Beige	5/64"	1.98 mm
#5.5 Beige	11/128"	2.16 mm
#6 Gold	3/32"	2.38 mm
#6.5 Gold	13/128"	2.59 mm
#7 Lime	7/64"	2.78 mm
#7.5 Lime	15/128"	2.97 mm
#8 Lavender	1/8"	3.18 mm
#8.5 Lavender	17/128"	3.38 mm
#9 Grey	9/64"	3.57 mm
#9.5 Grey	19/128"	3.76 mm
#10 Turquoise	5/32"	3.97 mm
#10.5 Turquoise	21/128"	4.17 mm
#11 Yellow	11/64"	4.37 mm
#11.5 Yellow	23/128"	4.57 mm
#12 Red	3/16"	4.76 mm
#12.5 Red	25/128"	4.95 mm
#13 White	13/64"	5.16 mm
#13.5 White	27/128"	5.36 mm
#14 Blue	7/32"	5.56 mm
#14.5 Blue	29/128"	5.77 mm
#15 Dark Brown	15/64"	5.95 mm
#15.5 Dark Brown	31/128"	6.15 mm
#16 Orange	1/4"	6.35 mm
#16.5 Orange	33/128"	6.55 mm
#17 Dark Green	17/64"	6.75 mm
#17.5 Dark Green	35/128"	6.93 mm
#18 Purple	9/32"	7.14 mm
#18.5 Purple	37/128"	7.34 mm
#19 Black	19/64"	7.54 mm
#19.5 Black	39/128"	7.75 mm
#20 Dark Turquoise	5/16"	7.94 mm
#20.5 Dark Turquoise	41/128"	8.13 mm
#21 Mustard	21/64"	8.33 mm
#21.5 Mustard	43/128"	8.53 mm
#22 Maroon	11/32"	8.73 mm
#22.5 Maroon	45/128"	8.94 mm
#23 Cream	23/64"	9.13 mm
#23.5 Cream	47/128"	9.32 mm
#24 Dark Blue	3/8"	9.53 mm
#24.5 Dark Blue	49/128"	9.73 mm
#25 Copper	25/64"	9.92 mm
#25.5 Copper	51/128"	10.11 mm
#26 Bronze	13/32"	10.32 mm

Product Warranty

WARRANTY & DISCLAIMER

This warranty supersedes all other warranties expressed or implied.

No person has the authority to incur or assume for Hunter® Agriculture Incorporated (“Hunter Agriculture”) any other liability as to Hunter Agriculture Incorporated.

This warranty does not extend to any product or part that has been repaired, altered, or modified in any way outside the Hunter Agriculture factory, nor shall it apply to any product that has been subject to misuse, negligence, accident, or improper operation contrary to the Hunter Agriculture published instructions.

Under no circumstances will Hunter Agriculture be held responsible or liable for any consequential, incidental, or punitive damages resulting from the use of Senninger® products or from any product defects, failures, or malfunctions.

This warranty applies only to the original purchaser of the Senninger product and does not extend to any product or part manufactured by others.

MATERIALS AND WORKMANSHIP

Senninger products manufactured by Hunter Agriculture Incorporated for use in agriculture, turf, or nursery applications are warranted to be free of defects in materials or workmanship under normal use for a period of two (2) years from the date of manufacture.

Hunter Agriculture warrants the Senninger i-Wob®2 to be free of defects in materials or workmanship under normal use for a period of three (3) years from the date of manufacture.

Hunter Agriculture warrants the following products to be free of defects in materials or workmanship under normal use for a period of one (1) year from the date of manufacture: End Spray, limit valve regulators, and CMS mining models.

Hunter Agriculture warrants nozzles to retain their original orifice size under normal use for a period of five (5) years from the date of manufacture.

PERFORMANCE

Senninger products manufactured by Hunter Agriculture Incorporated for use in agriculture, turf, or nursery applications are warranted to maintain their original performance for a period of two (2) years from the date of manufacture if installed and operated in accordance with Hunter Agriculture’s published specifications and used as intended for irrigation purposes.

Hunter Agriculture warrants the Senninger i-Wob2 to maintain its original performance under normal use for a period of three (3) years from the date of manufacture.

Hunter Agriculture warrants the following products to maintain their original performance under normal use for a period of one (1) year from the date of manufacture: End Spray, PRLV and limit valve regulators, and mining models.

REPAIR OR REPLACEMENT

If a Senninger product is suspected of failure during the applicable warranty period, Hunter Agriculture Incorporated will repair or replace the product or the defective part at its option. Contact Hunter Agriculture customer service in Clermont, Florida, USA, for specific instructions on how to proceed with a warranty claim. If, after inspection of the product and documentation, the failure is deemed a warranty issue, a replacement or credit will be authorized.

Hunter Agriculture is not obligated to pay for repairs or replacements made by anyone else. No labor allowances will be made for the removal or replacement of warranted parts or for travel to and from the product to make said repairs or replacements without prior written authorization from Hunter Agriculture.

SUITABILITY

There are no other warranties, expressed or implied, including warranties of merchantability and fitness for a particular purpose. It is the sole responsibility of the purchaser to consider and analyze the product and its design to determine whether it is suitable for specific applications.

Hunter® | *Mining Irrigation*

At Hunter® Agricultural Irrigation, our commitment is to continue developing world-class Senninger® irrigation products and providing local support and technical expertise. This results in the most efficient and reliable irrigation solutions available today.



Steve Abernethy, President of Hunter Agricultural Irrigation

Website hunterirrigation.com/agriculture | **Customer Support** +1-407-877-5655

Domestic Customer Service us-cs@hunter.global | **International Customer Service** intl-cs@hunter.global

FLORIDA HEADQUARTERS

1963 Healy Way
Clermont, FL 34711 USA
Tel: +1-407-877-5655

NEBRASKA WAREHOUSE

1713 Holland Drive
Grand Island, NE 68803 USA
Tel: +1-308-381-8558

TEXAS WAREHOUSE

5810 50th Street
Lubbock, TX 79424 USA
Tel: +1 -806-793-3010

BRAZIL

Praça Emilio Marconato
1000 Galpão G-44
Núcleo Residencial Doutor João Aldo Nassif
Jaguariúna - SP CEP 13916-074
Tel: +55-19-3802-1917

© 2025 Hunter Industries Inc., Hunter, the Hunter logo, Senninger, and other marks are trademarks of Hunter Industries Inc., registered in the U.S. and certain other countries. Please recycle.