



Easy Installation: Twist lock fittings on barb connections

Compact size: aids in coiling of premade assemblies

Corrosion resistance: No external metal parts

Multiple models: based on pressure and tape or tubing preference

PRLG WITH BARB CONNECTION

Installation convenience for field and drip irrigation

The Senninger® PRLG, Pressure Regulator Landscape Grade, is now available in three new models with barb connections - tape, 500, and 600. It is ideal for use along the laterals. The PRLG-Barb design with its reverse-thread twist lock nuts reduces installation time because the fittings are already in place. No tools are required.



Learn more.
Scan here to
visit our website


PRLG BARB PRESSURE REGULATOR FEATURES AND SPECIFICATIONS

Features

- Twist lock fittings provide easy tool-free installation
- Compact size aids in coiling of pre-made assemblies
- Three barb and lock models: tape, 500, and 600
- Three pressure models: 10 psi (0.69 bar), 15 psi (1.03 bar), and 20 psi (1.38 bar)
- Flows: 0.5 to 7 gpm (114 to 1590 L/hr)
- Maximum inlet pressure: 50 psi (3.45 bar)
- Pressure-tested to ensure quality and performance
- No external metal parts for corrosion resistance
- Two-year warranty on materials, workmanship, and performance

Installation

- Lock nuts are loose
- Tighten the reverse thread lock nuts up to the regulator housing
- Slide the tubing over the barb
- Ensure the tubing goes up to the edge of the lock nut
- Hand-tighten the lock nut over the tubing for a secure connection

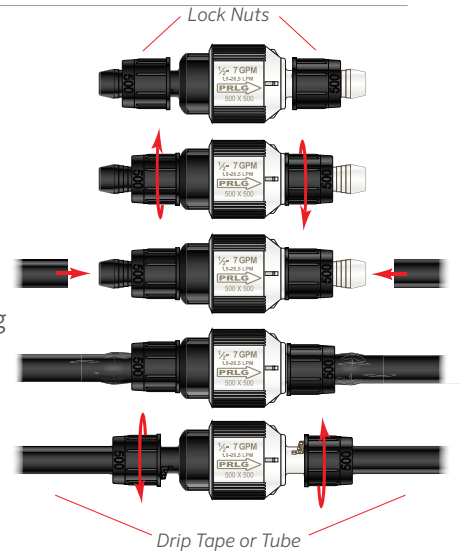

PRLG BARB DESIGN CRITERIA	Preset Operating Pressure	Locking Nut Description	Barb Size	Tubing ID	Maximum Inlet Pressure	Flow Range
PRLG10TLBTLB	10 psi (0.69 bar)	tape lock x tape lock (green)	5/8"	0.625" - 0.645" (15.9 - 16.4 mm)	25 psi (1.72 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG15TLBTLB	15 psi (1.03 bar)	tape lock x tape lock (green)	5/8"	0.625" - 0.645" (15.9 - 16.4 mm)	25 psi (1.72 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG105LB5LB	10 psi (0.69 bar)	500 lock x 500 lock (black)	16 mm	0.510" - 0.580" (12.9 - 14.7 mm)	50 psi (3.45 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG155LB5LB	15 psi (1.03 bar)	500 lock x 500 lock (black)	16 mm	0.510" - 0.580" (12.9 - 14.7 mm)	50 psi (3.45 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG205LB5LB	20 psi (1.38 bar)	500 lock x 500 lock (black)	16 mm	0.510" - 0.580" (12.9 - 14.7 mm)	50 psi (3.45 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG106LB6LB	10 psi (0.69 bar)	600 lock x 600 lock (black)	18 mm	0.590" - 0.630" (15.0 - 16.0 mm)	50 psi (3.45 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG156LB6LB	15 psi (1.03 bar)	600 lock x 600 lock (black)	18 mm	0.590" - 0.630" (15.0 - 16.0 mm)	50 psi (3.45 bar)	0.5 - 7 gpm (114 - 1590 L/hr)
PRLG206LB6LB	20 psi (1.38 bar)	600 lock x 600 lock (black)	18 mm	0.590" - 0.630" (15.0 - 16.0 mm)	50 psi (3.45 bar)	0.5 - 7 gpm (114 - 1590 L/hr)

The pressure regulator shall maintain the predetermined pressure provided that the inlet pressure is at least 5 psi (0.34 bar) above the expected outlet pressure, but not exceeding the maximum inlet pressure as shown in this chart.

Pressure regulators should always be installed downstream of all shut-off valves.

Website hunterirrigation.com/agriculture | **Customer Support** +1-407-877-5655

The Hunter® Agricultural Irrigation commitment to world-class Senninger® products, local support and technical expertise ensure we provide the most efficient and reliable agricultural irrigation solutions available in the world today.

Steve Abernethy

Steve Abernethy, President of Hunter® Agricultural Irrigation